Components of quantum-optical systems

Photon sources ____ **Transmission channels** ____ **“Processing” elements** ____ **Photon detectors**

Attenuated laser source

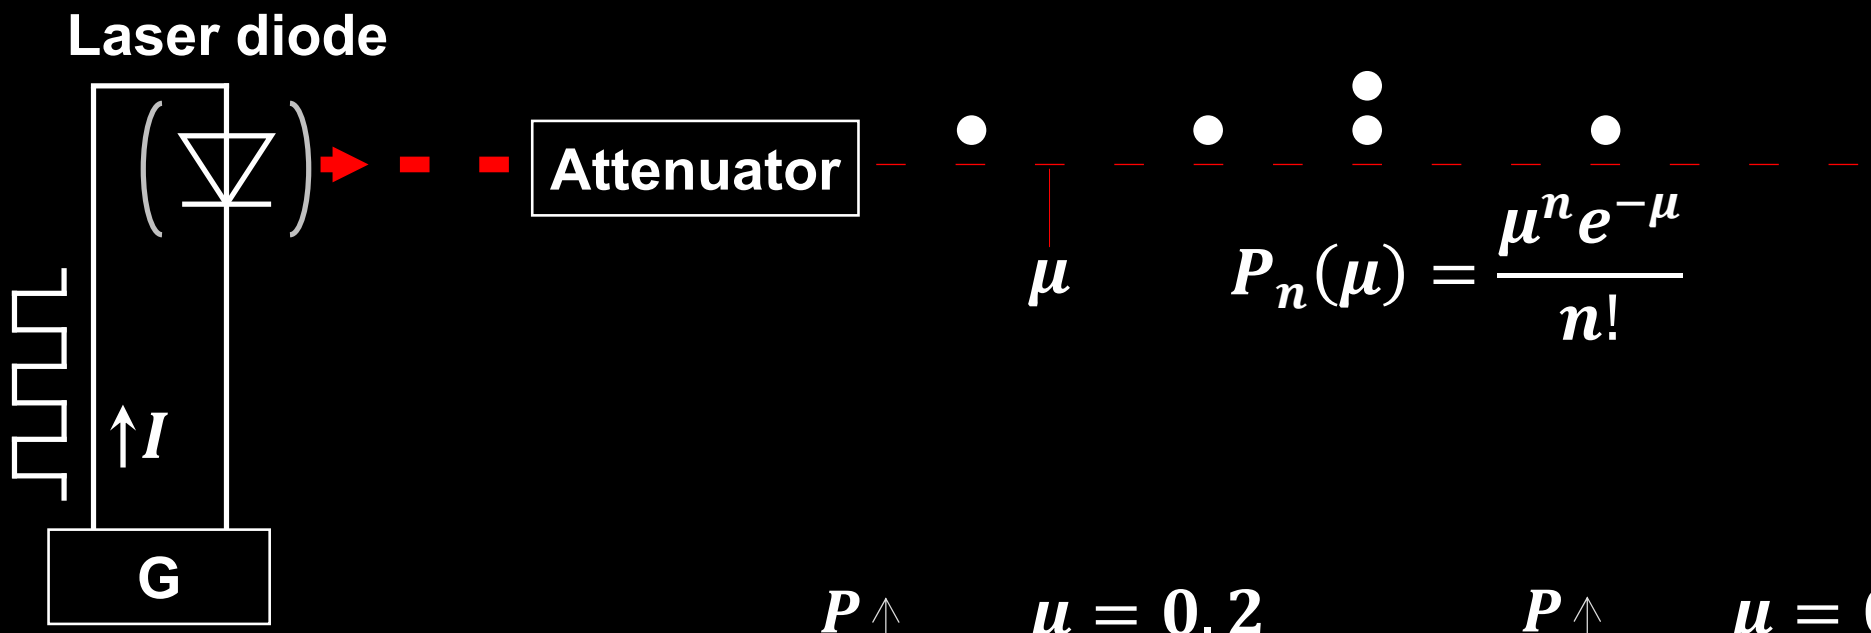

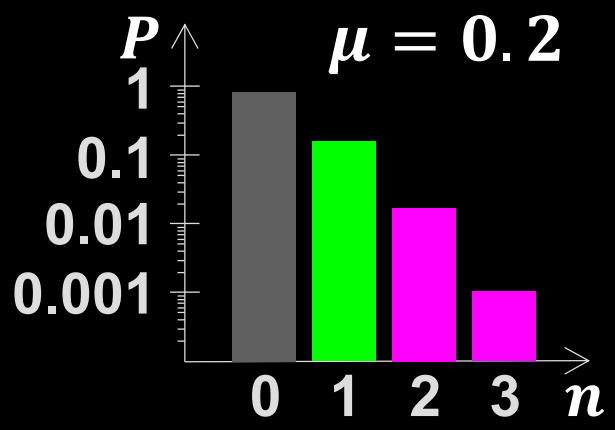

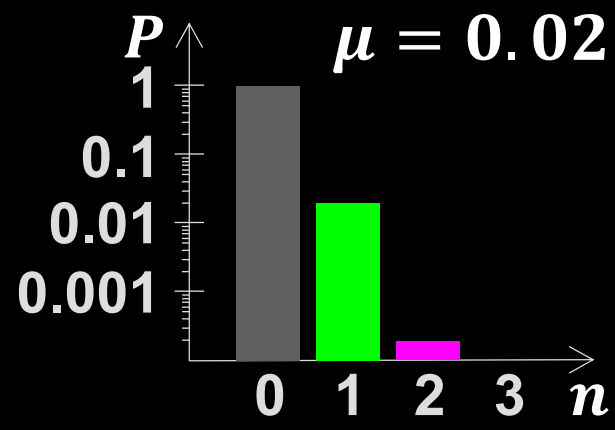

S. J. van Enk, C. A. Fuchs, arXiv:quant-ph/0111157

Spontaneous parametric down-conversion

Type II

Energy conservation: $\omega_p = \omega_s + \omega_i$

Momentum conservation: $\vec{k}_p = \vec{k}_s + \vec{k}_i$

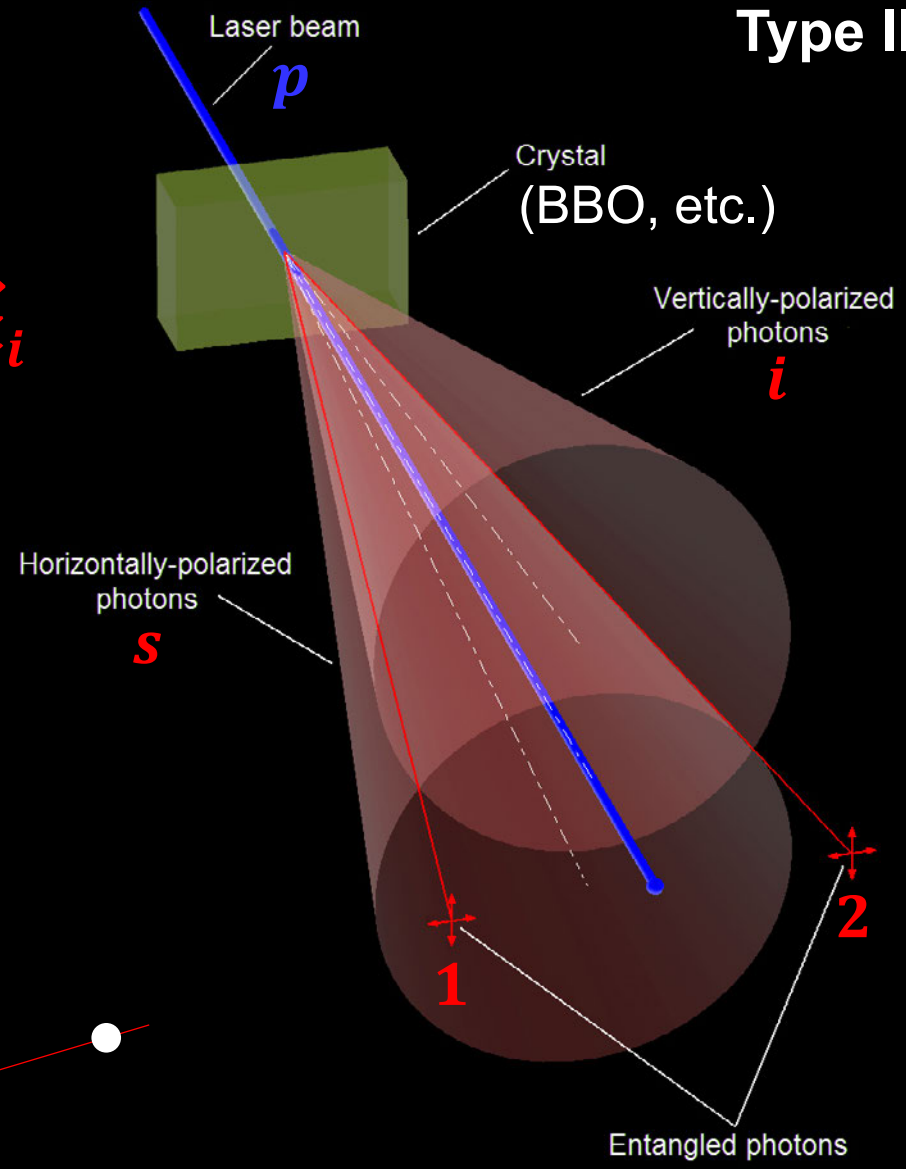

$$|\psi\rangle = (|H_1, V_2\rangle + |V_1, H_2\rangle)/\sqrt{2}$$

Heralded photon source

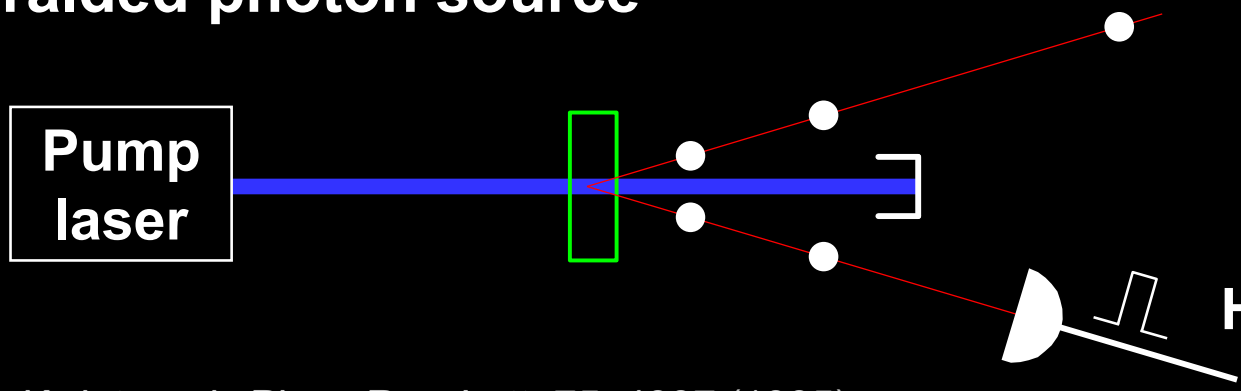

P. G. Kwiat *et al.*, Phys. Rev. Lett. **75**, 4337 (1995)

Image reprinted from: Wikipedia

Transmission in free space

Vacuum: Gaussian optics

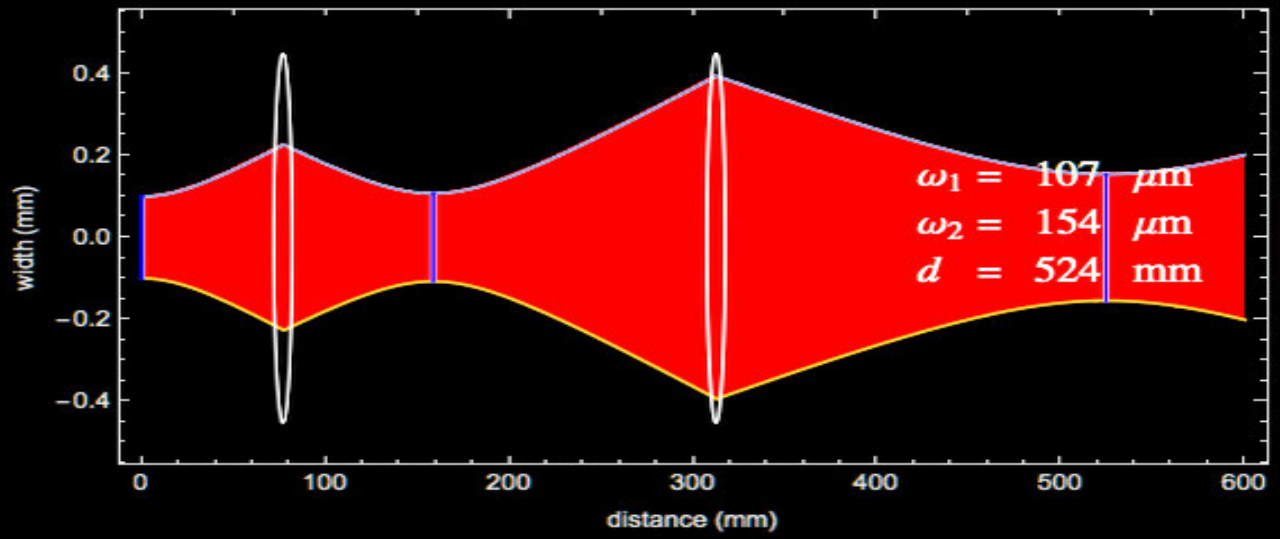

Atmosphere: loss, turbulence

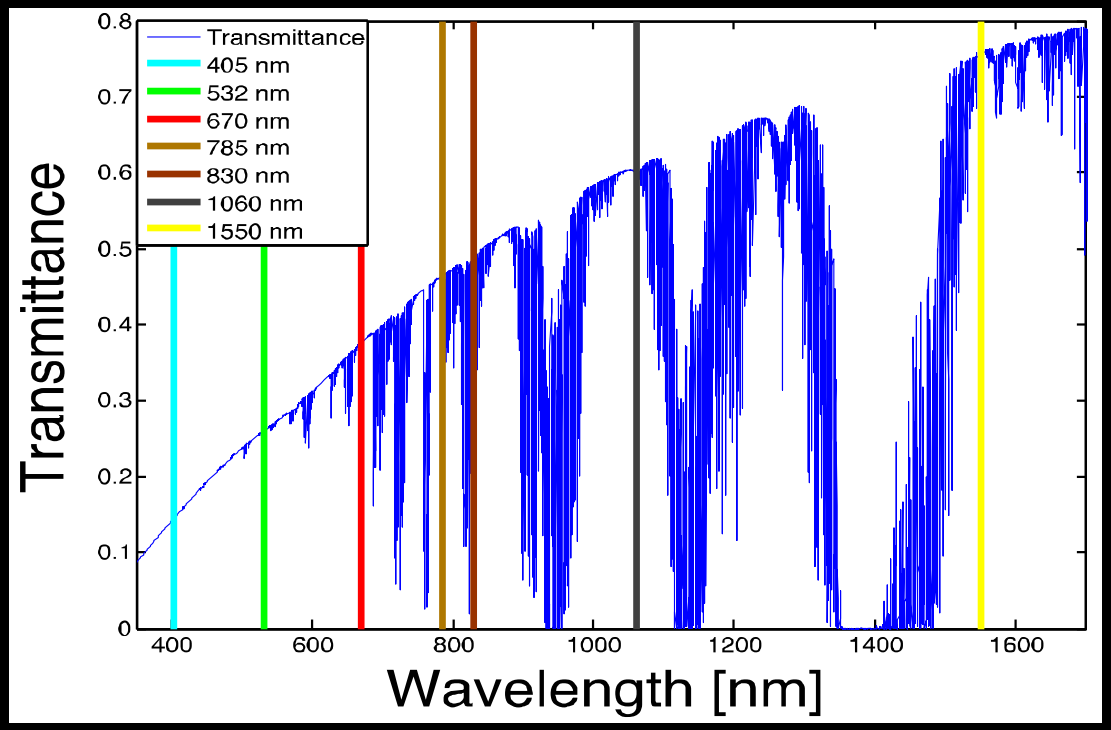

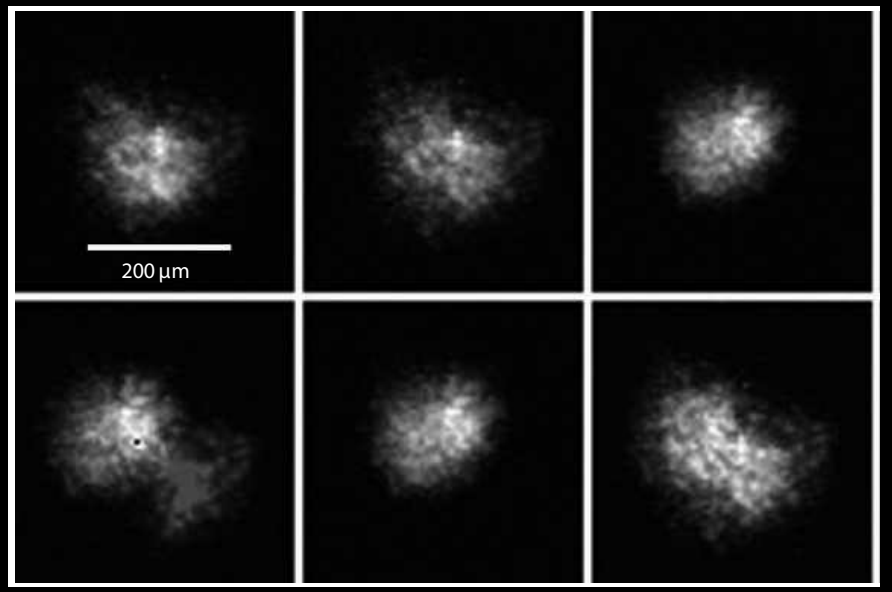

Images reprinted from: https://demonstrations.wolfram.com/GaussianBeamPropagationThroughTwoLenses/; Wikipedia; J.-P. Bourgoin *et al.*, New J. Phys. **15**, 023006 (2013); R. Ursin *et al.*, Nat. Phys. **3**, 481 (2007)

Transmission in optical fiber

Single-mode fiber

125 μm diameter cladding
fused quartz, $n_1 = 1.45$

8 μm diameter core
$n_2 > n_1$

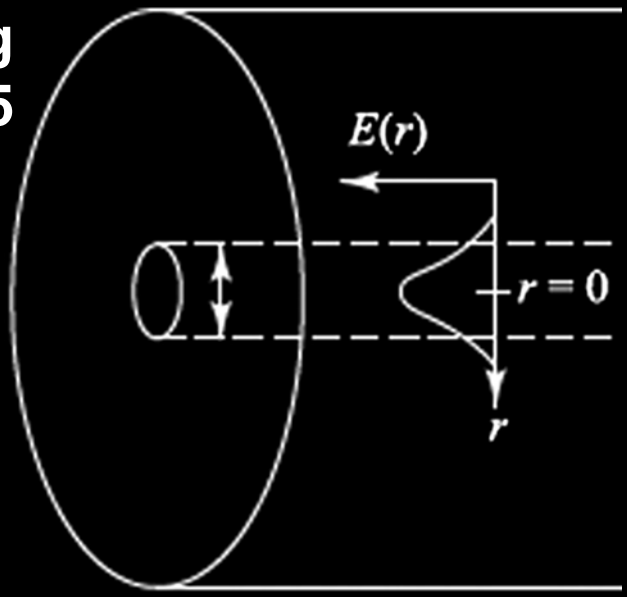

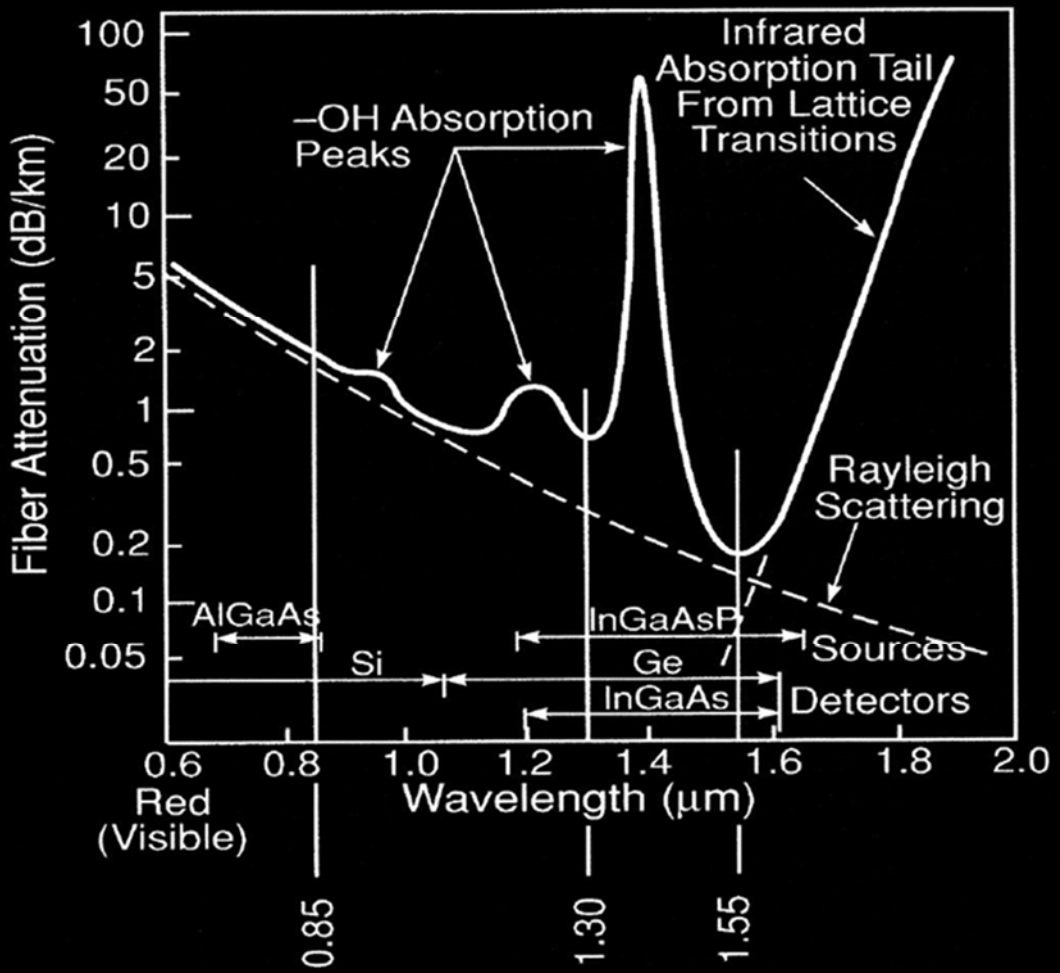

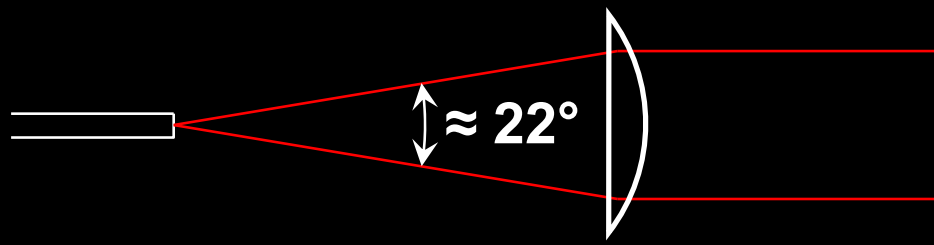

Fiber vs. beam in vacuum: loss scaling

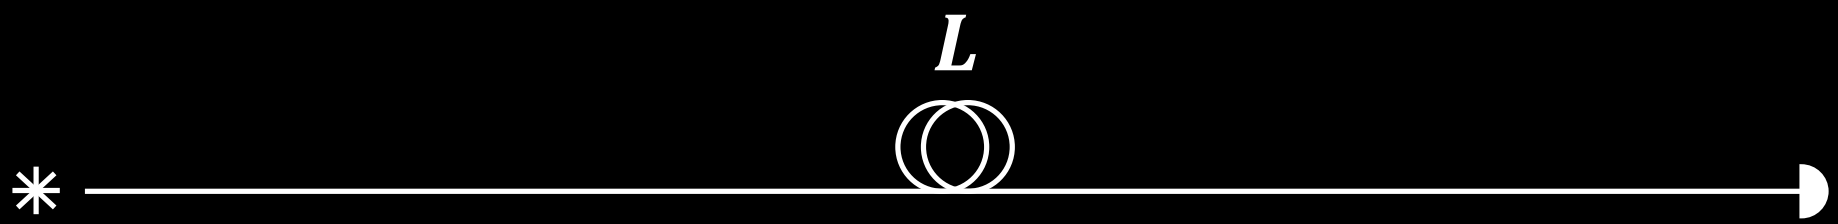

$T \propto e^{-\alpha L}$

Exponential

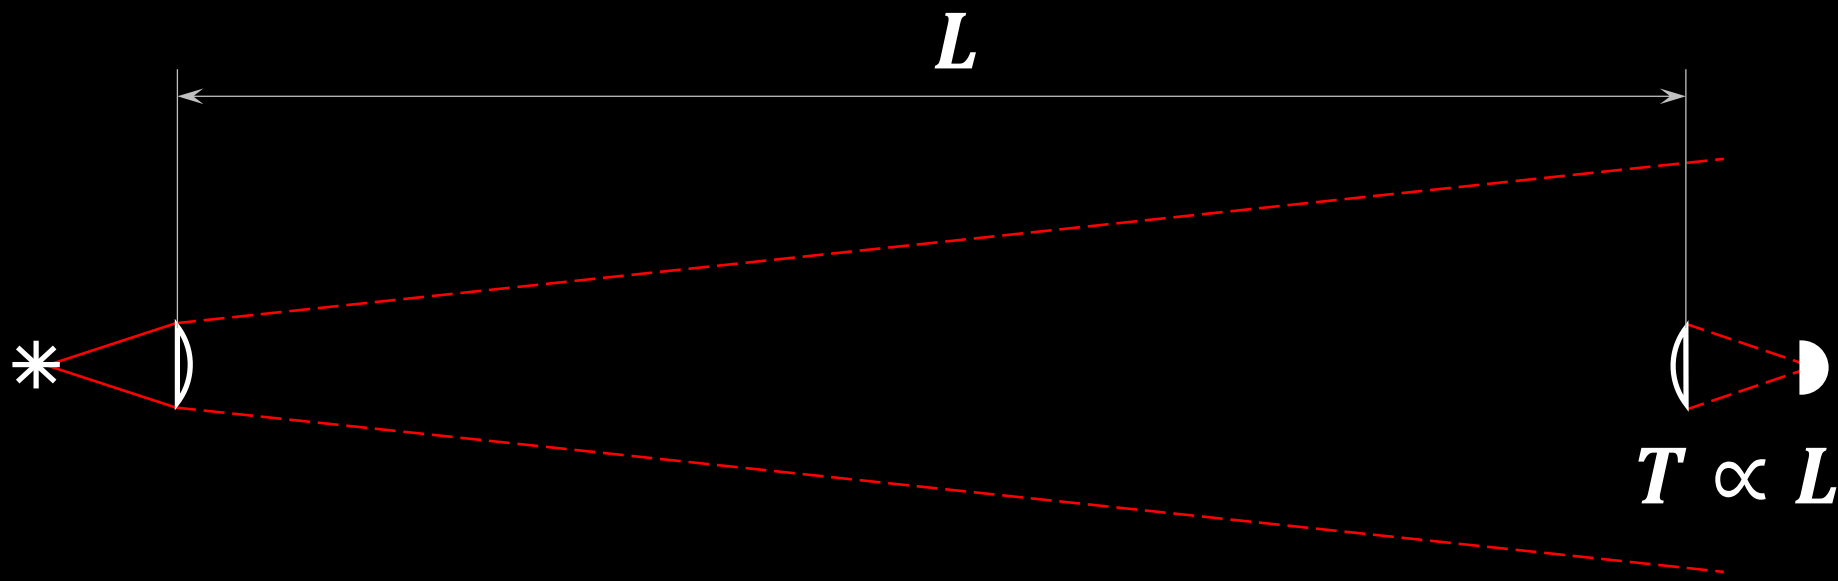

$T \propto L^{-2}$

Polynomial

Free space vs. fiber

At 1000 km, even with a perfect single-photon source of 10 GHz, ideal photon detectors, and 0.2 dB/km fiber losses, one would detect only 0.3 photon on average per century!

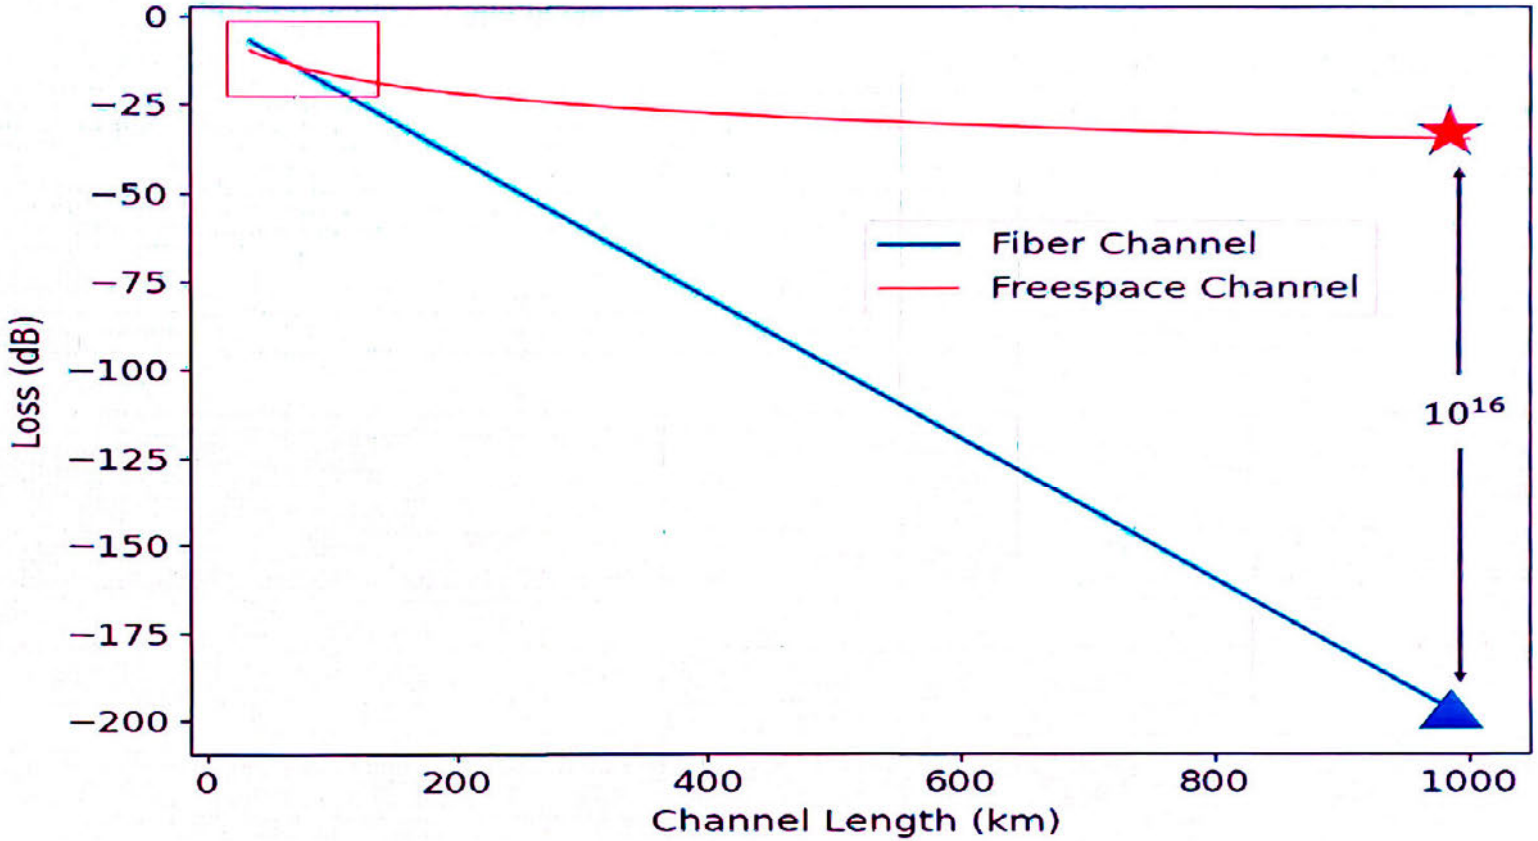

Y.-A. Chen, presentation at ICEQT 2025

Polarizers



Birefringent polarizing beamsplitter

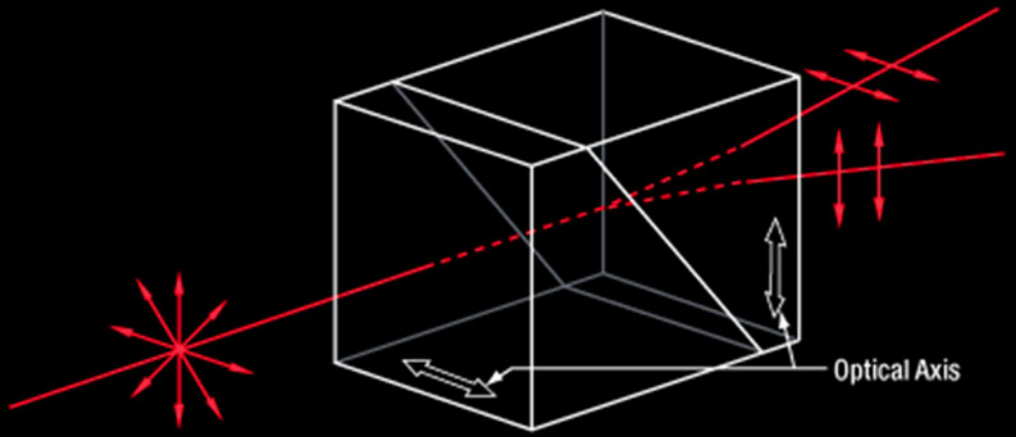

Wollaston prism

Polarizing beamsplitter cube

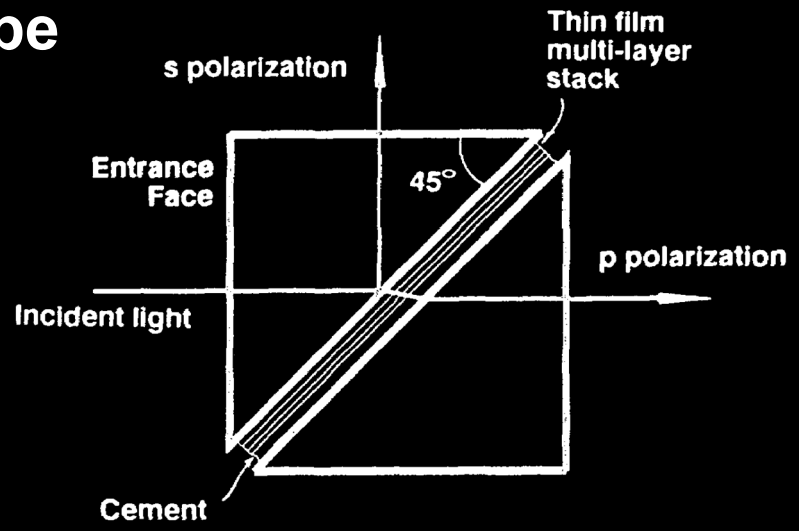

Images reprinted from: Thorlabs; J. L. Pezzaniti, R. A. Chipman, Appl. Opt. **33**, 1916 (1994)

Beamsplitters

50:50
10:90
1:99

Fiber-optic fused beamsplitter (or coupler)

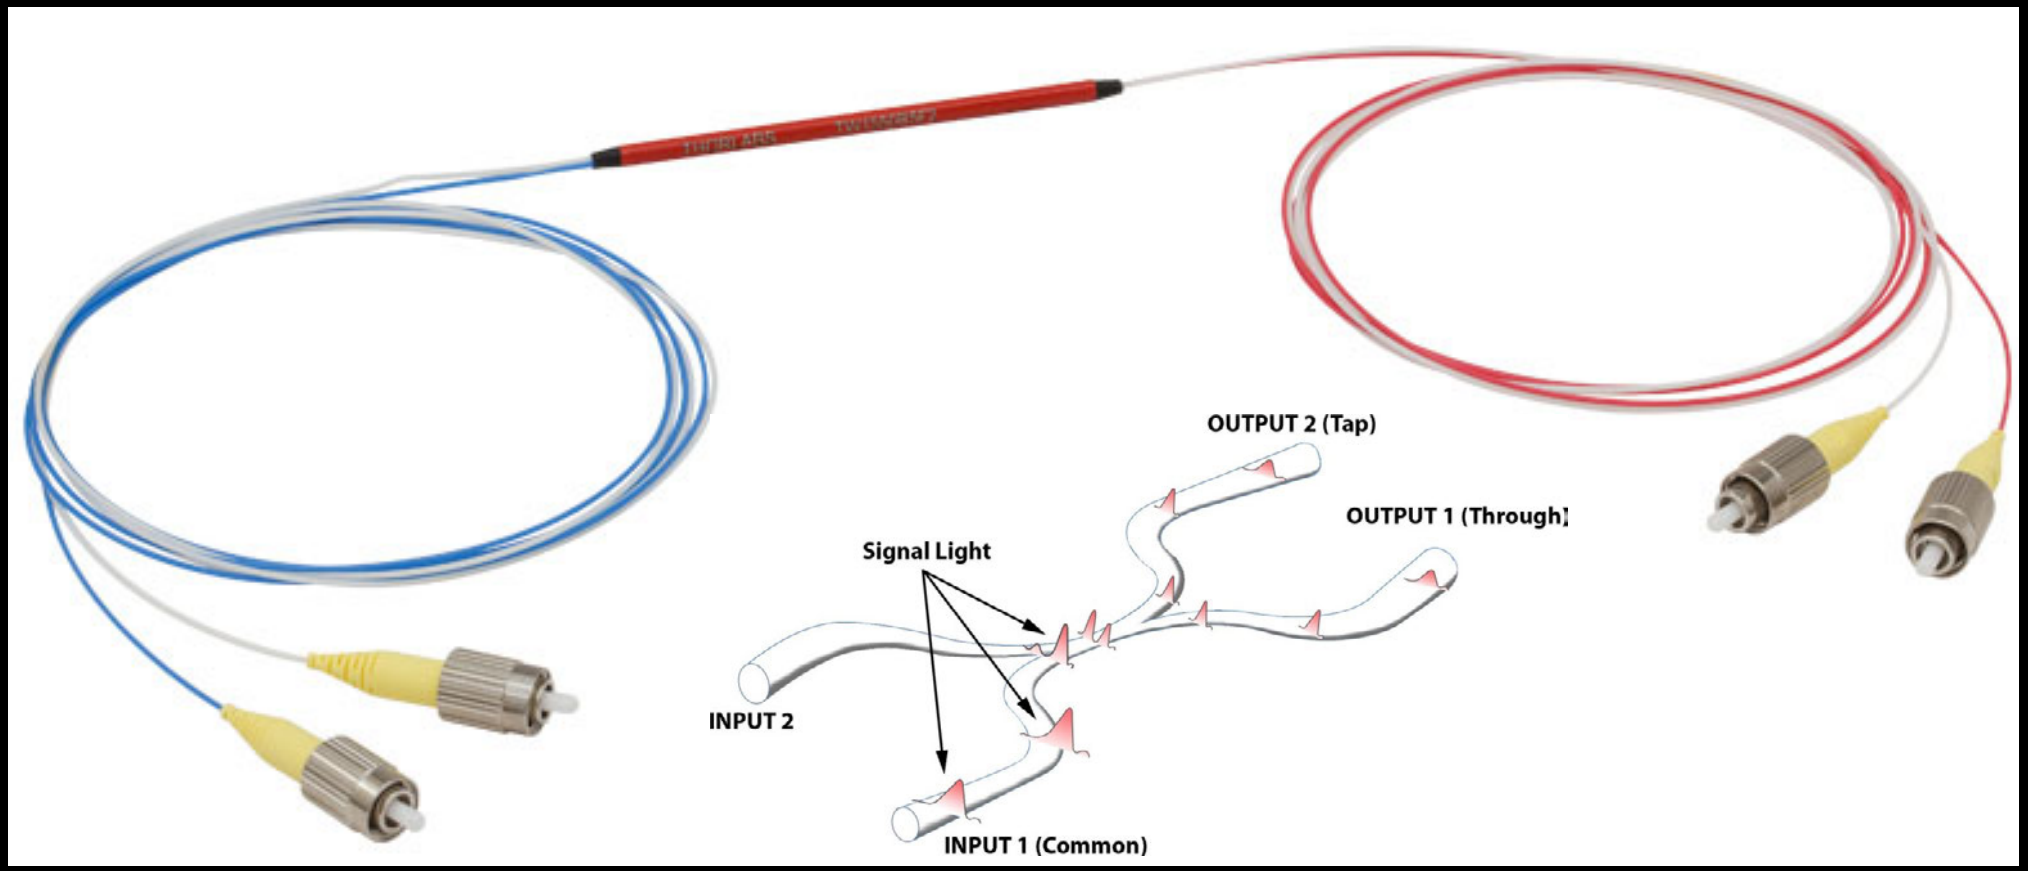

Images reprinted from: Thorlabs; Go!Foton

Attenuators

Absorbing or partially reflecting coated glass

Variable

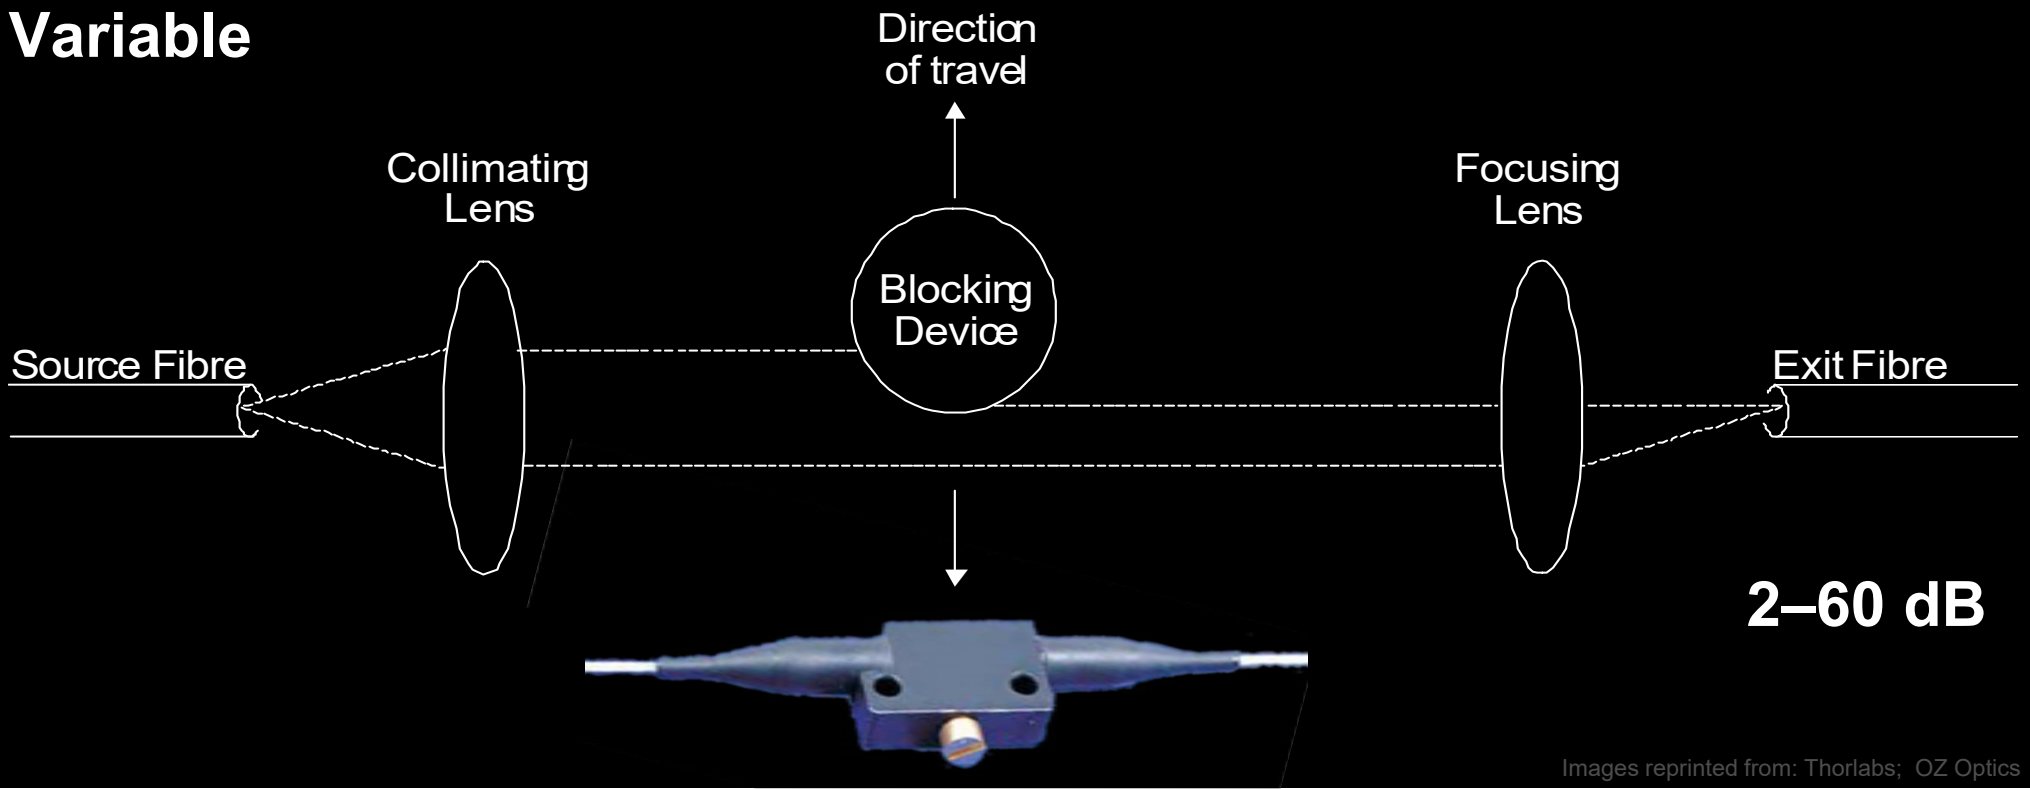

2–60 dB

Images reprinted from: Thorlabs; OZ Optics

Wavelength filters

Colored glass

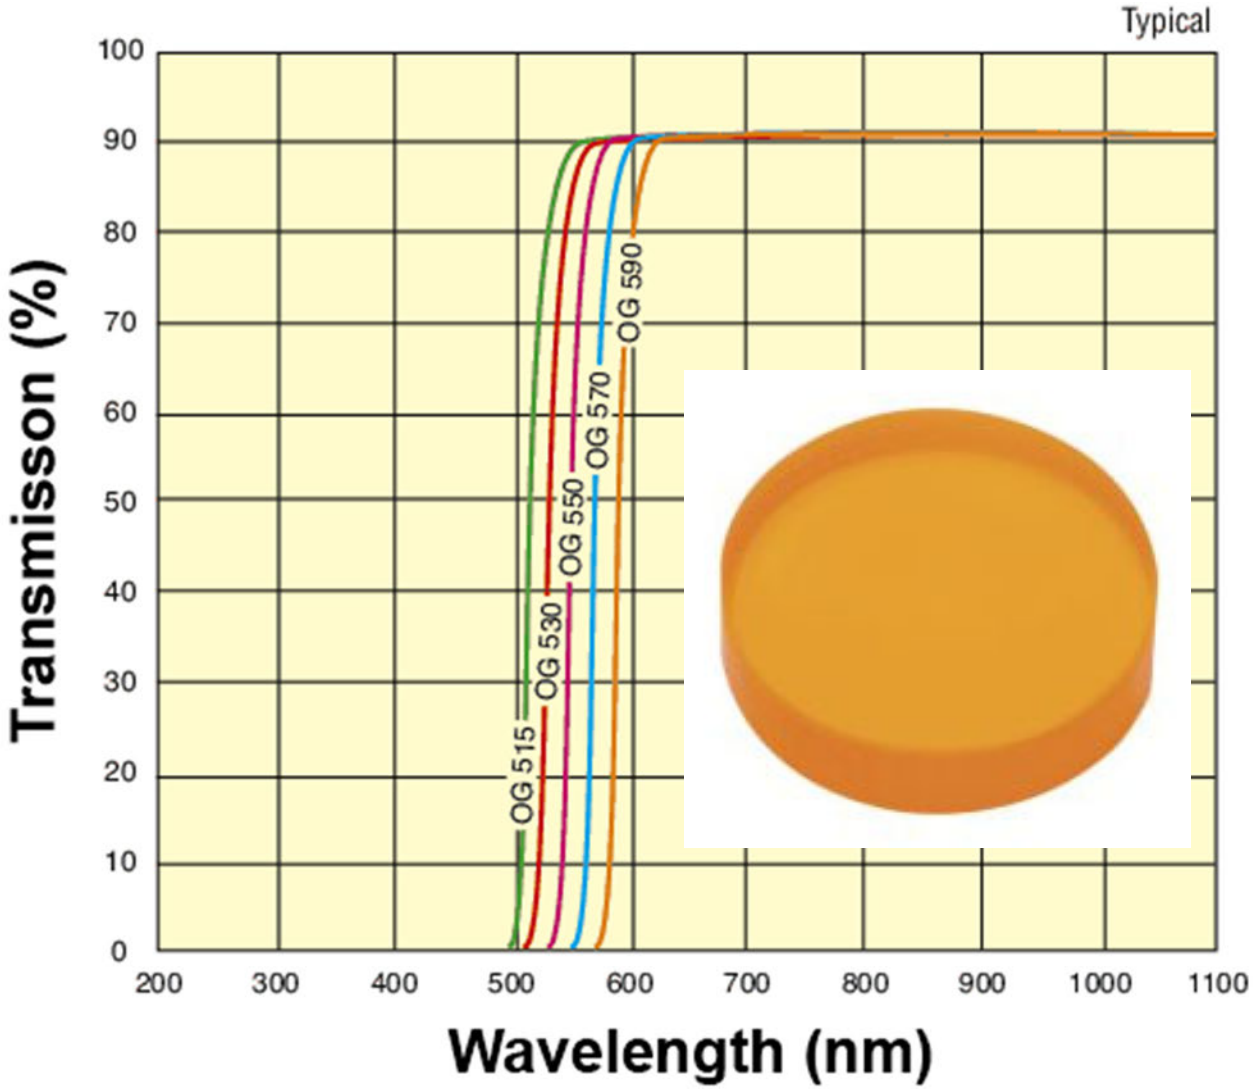

Image reprinted from: Newport

Wavelength filters

Interference filter

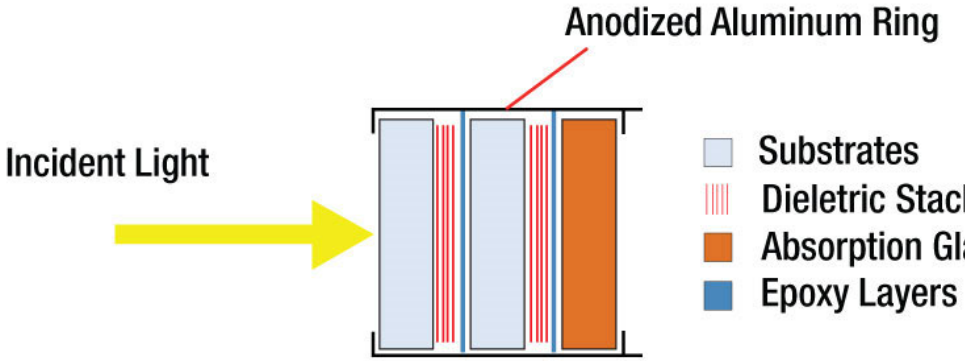

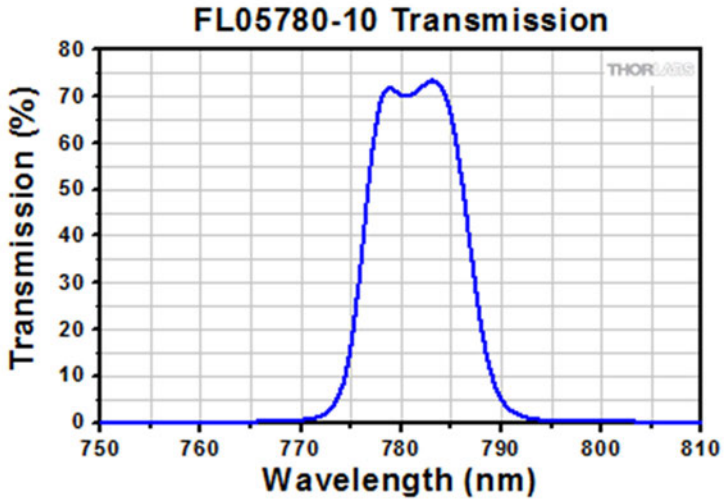

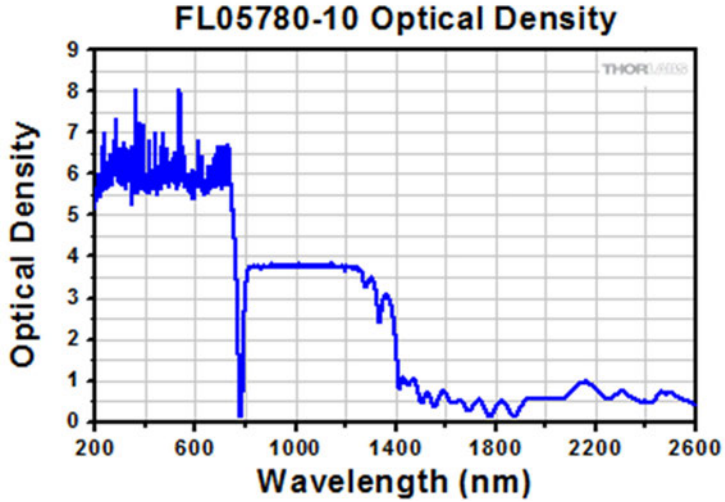

Fiber Bragg grating

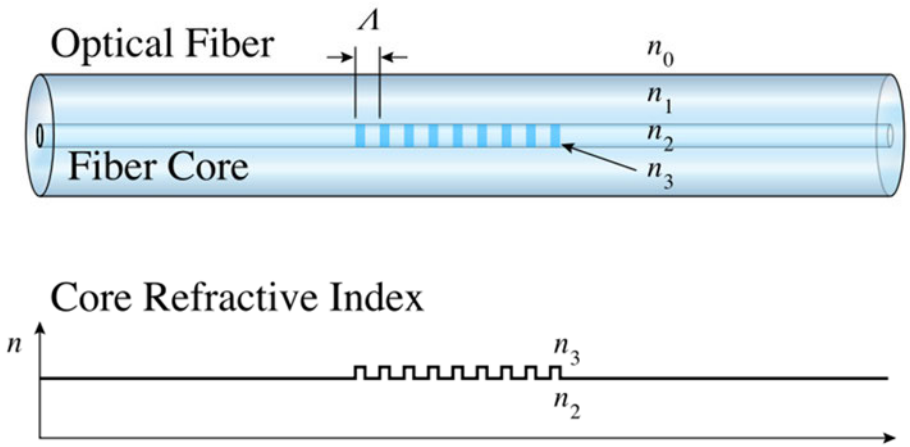

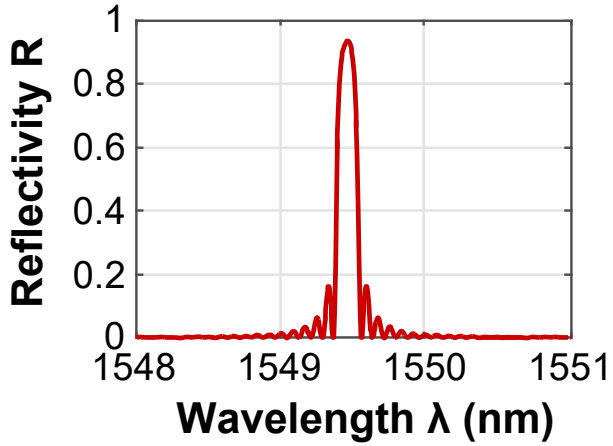

Images reprinted from: Thorlabs; Wikipedia; F. Seng *et al.*, Appl. Opt. **55**, 7179 (2016)

Polarization controller (slow)

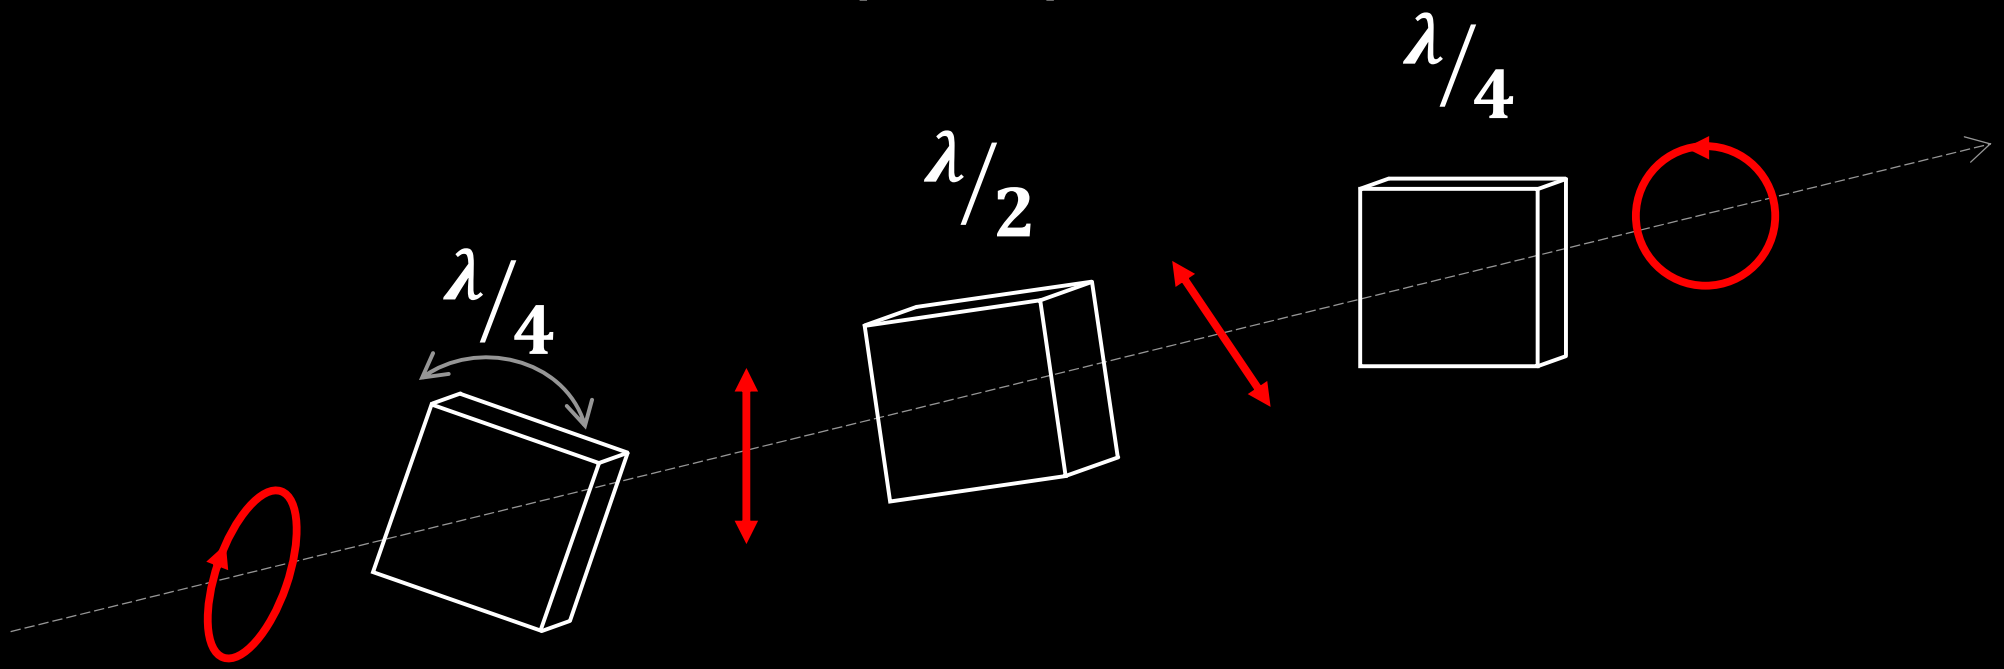

www.thorlabs.com/NewGroupPage9.cfm?ObjectGroup_ID=343

Polarization modulator (fast)

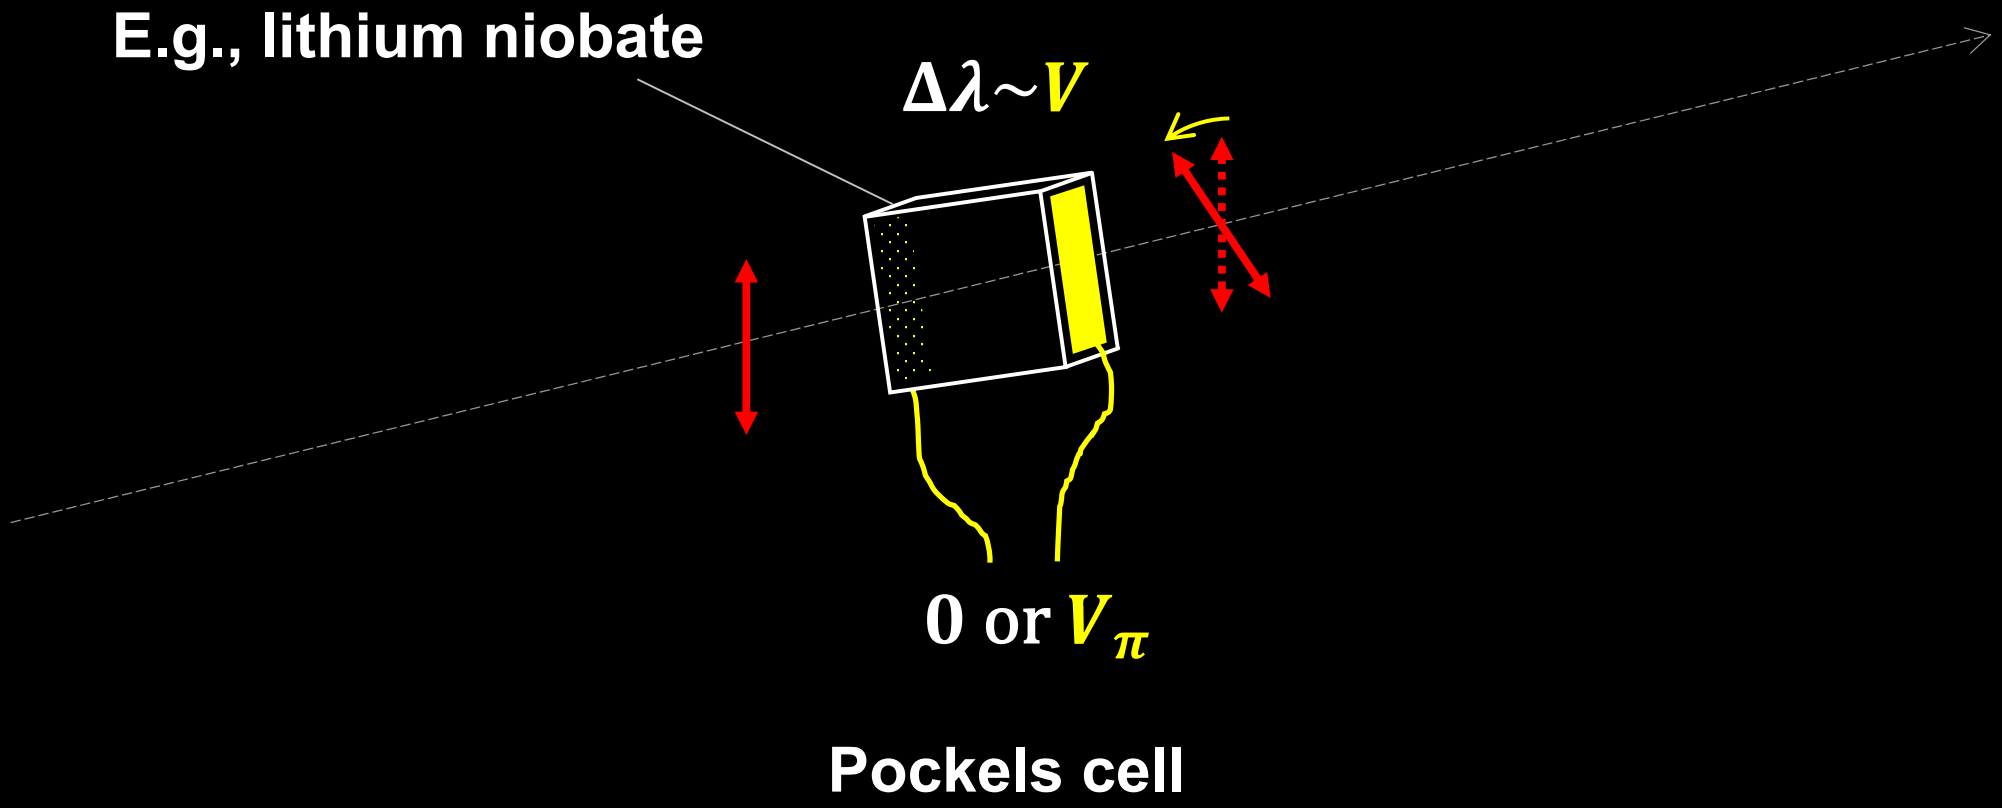

Phase modulator

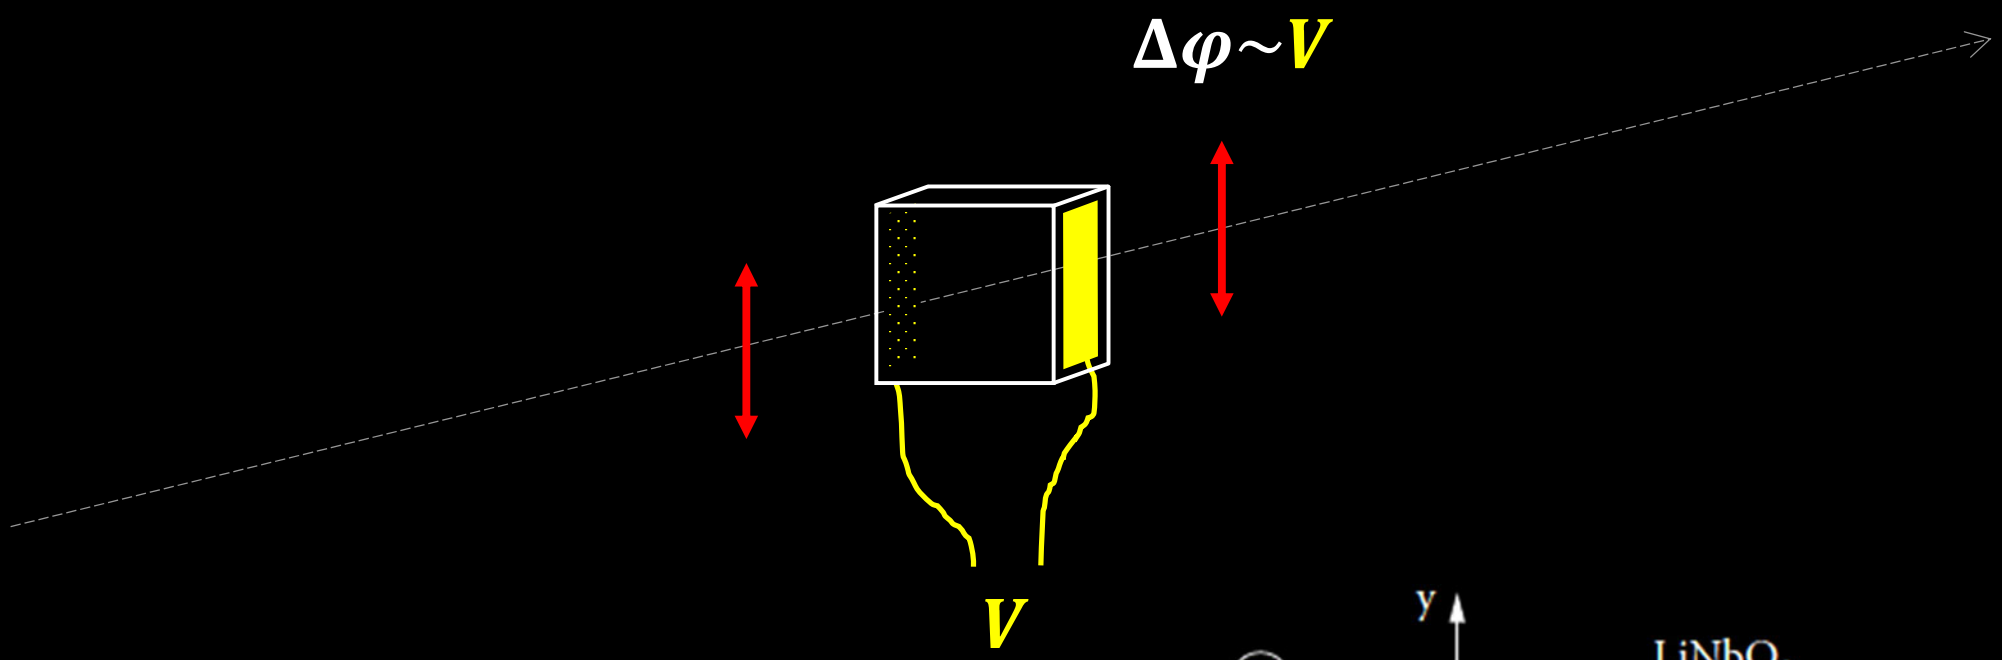

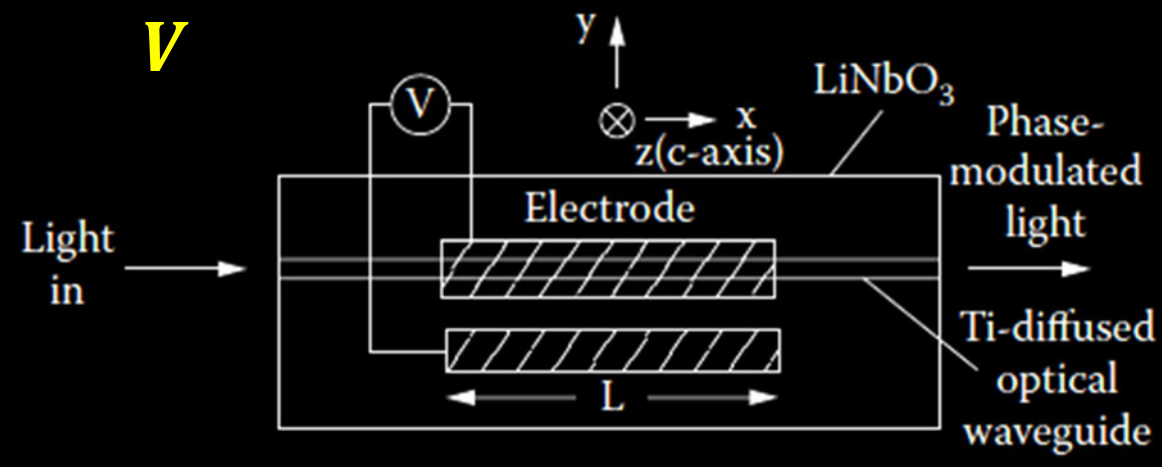

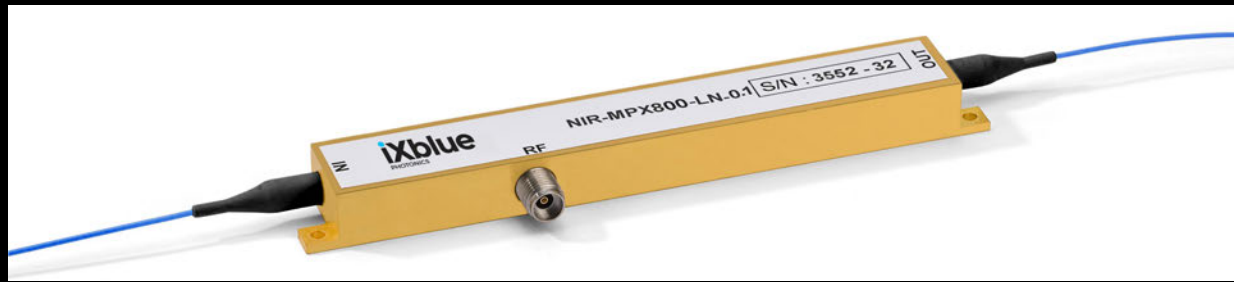

Images reprinted from: A. E.-N. A. Mohamed *et al.*, Int. J. Multidiscip. Sci. Eng. **2**, 13 (2011); iXblue Photonics

Intensity modulator

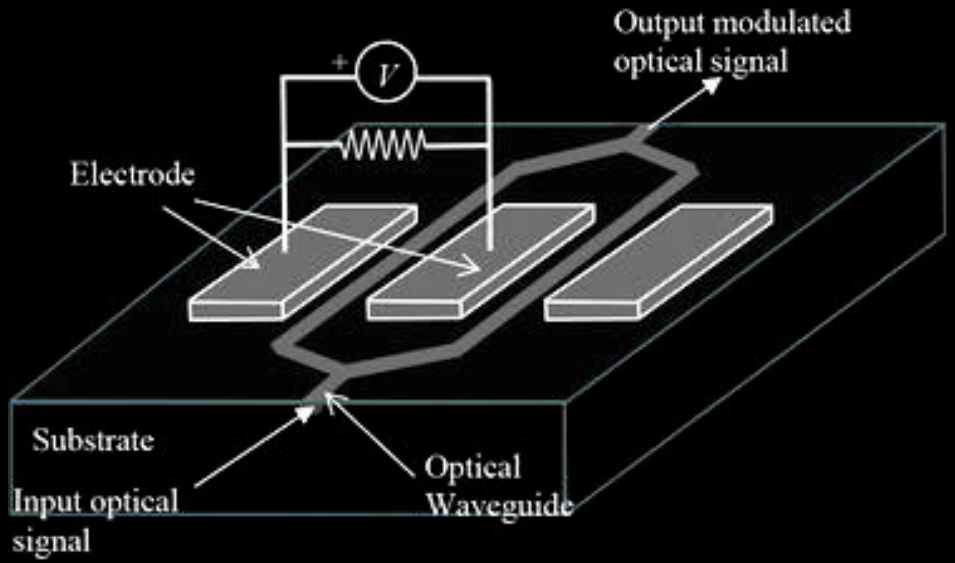

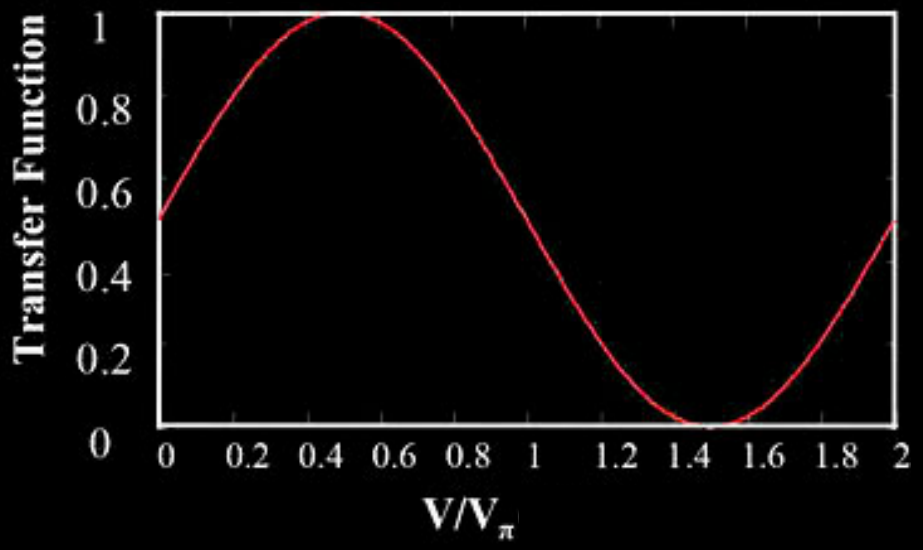

Mach-Zehnder interferometer

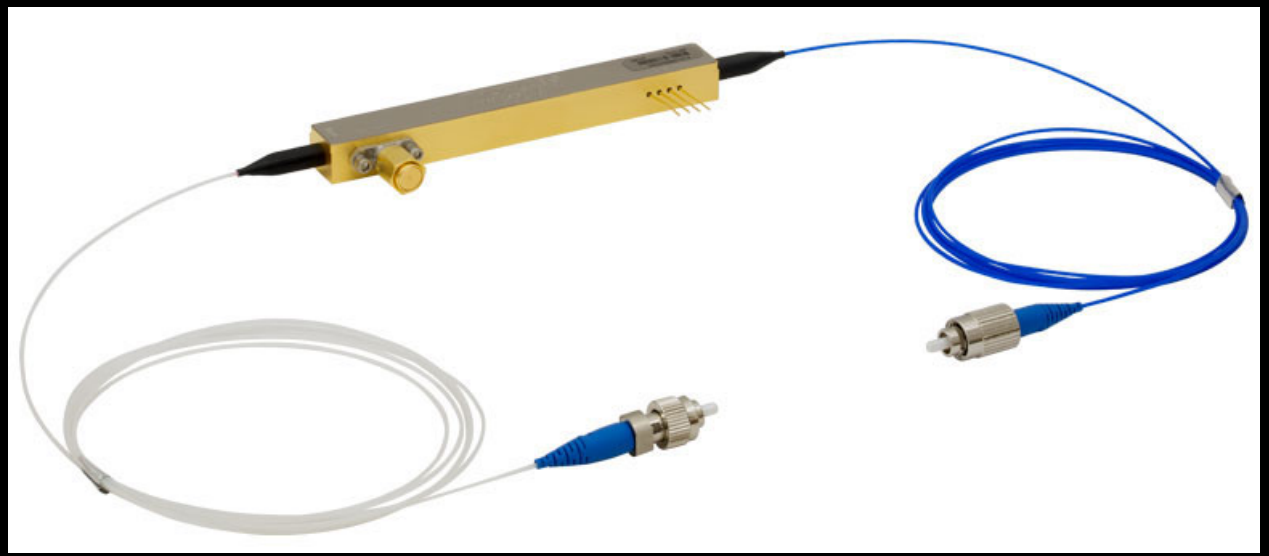

Images reprinted from: Optical Communication Technology, P. Pinho, ed., IntechOpen (2017); Thorlabs

Directional elements

Isolator (an “optical diode”)



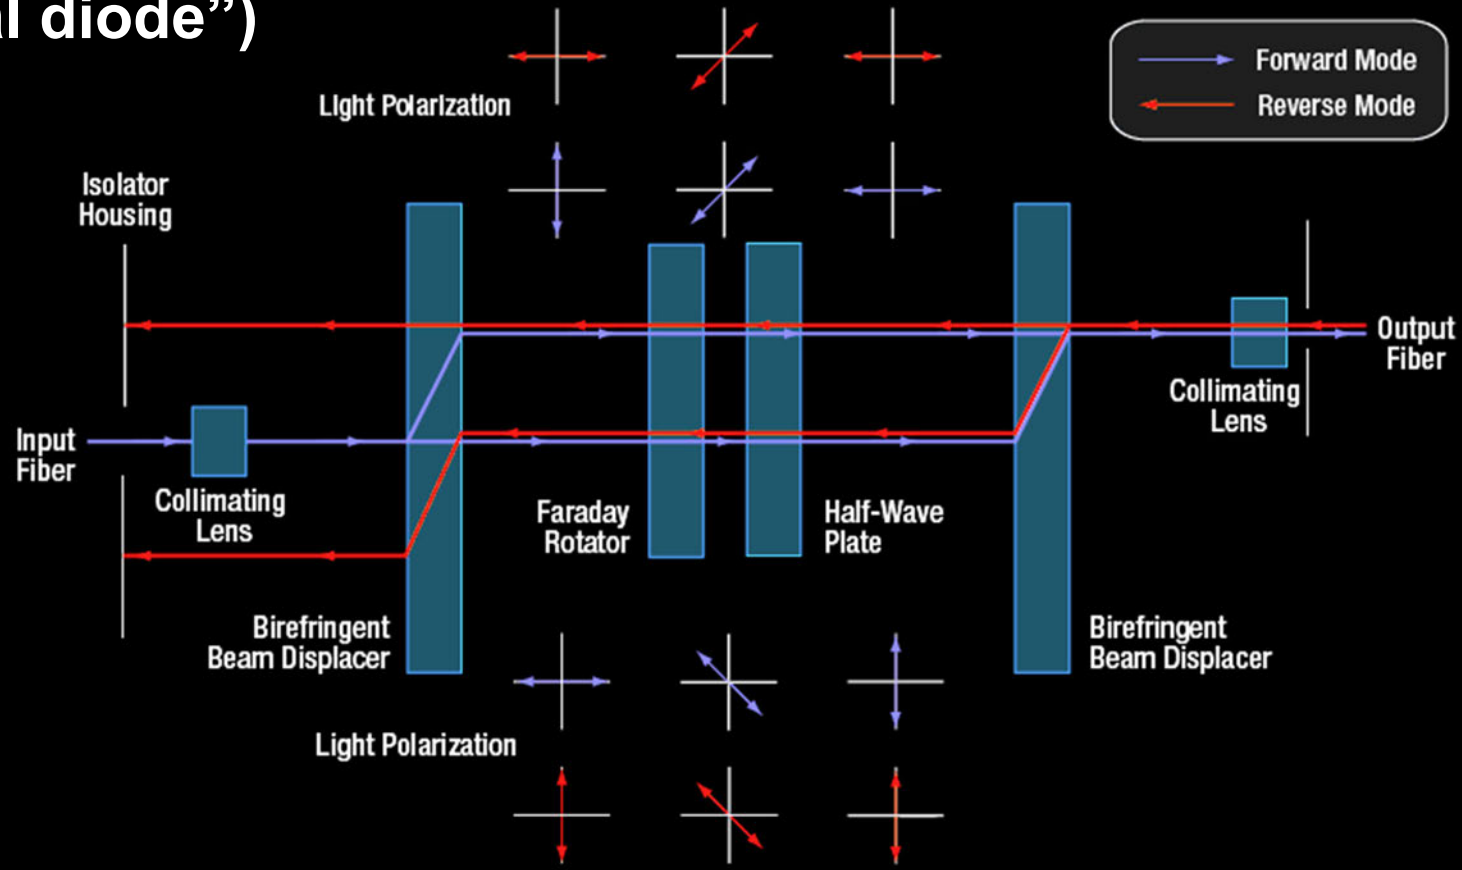

Circulator

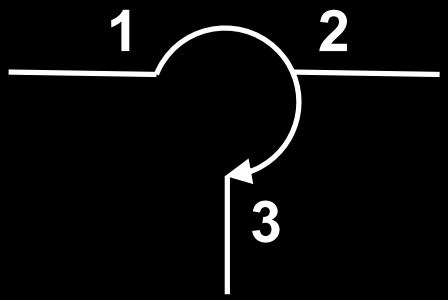

$1 \rightarrow 2$

$2 \rightarrow 3$

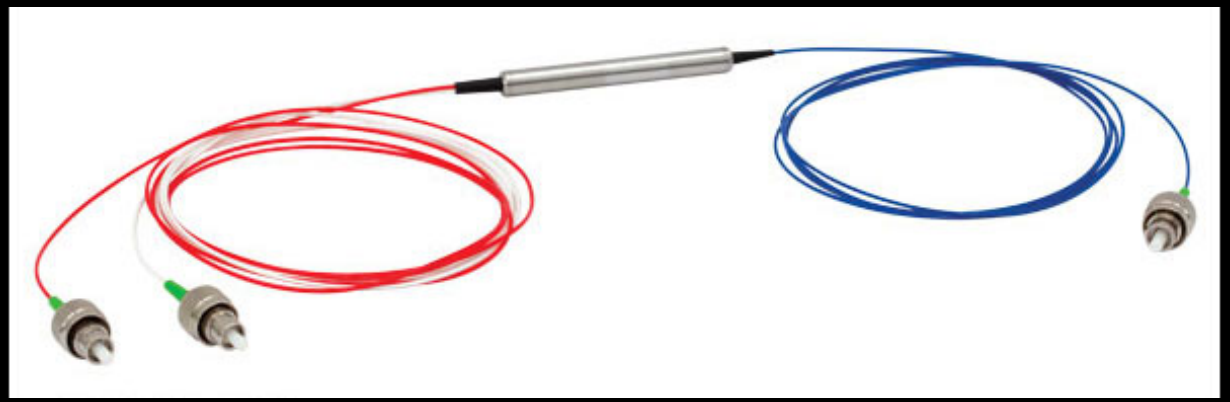

Images reprinted from: Thorlabs

Optical power meters

Thermal

> 10 µW

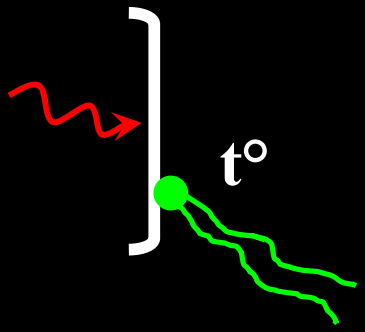

Photodiode

> 0.1 nW

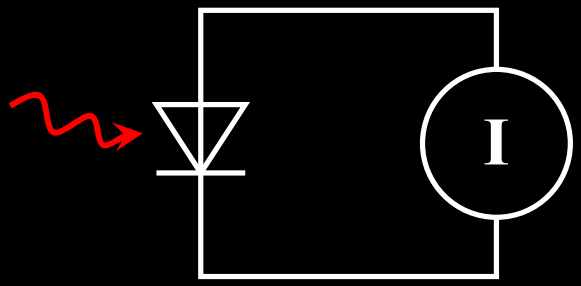

Single-photon detectors

Photon energy

$$E = \frac{hc}{\lambda} = \frac{19.9 \times 10^{-26}}{1.55 \times 10^{-6}} = 1.28 \times 10^{-19}\ \mathrm{J}$$

⬇

Need a gain mechanism

Photomultiplier tube

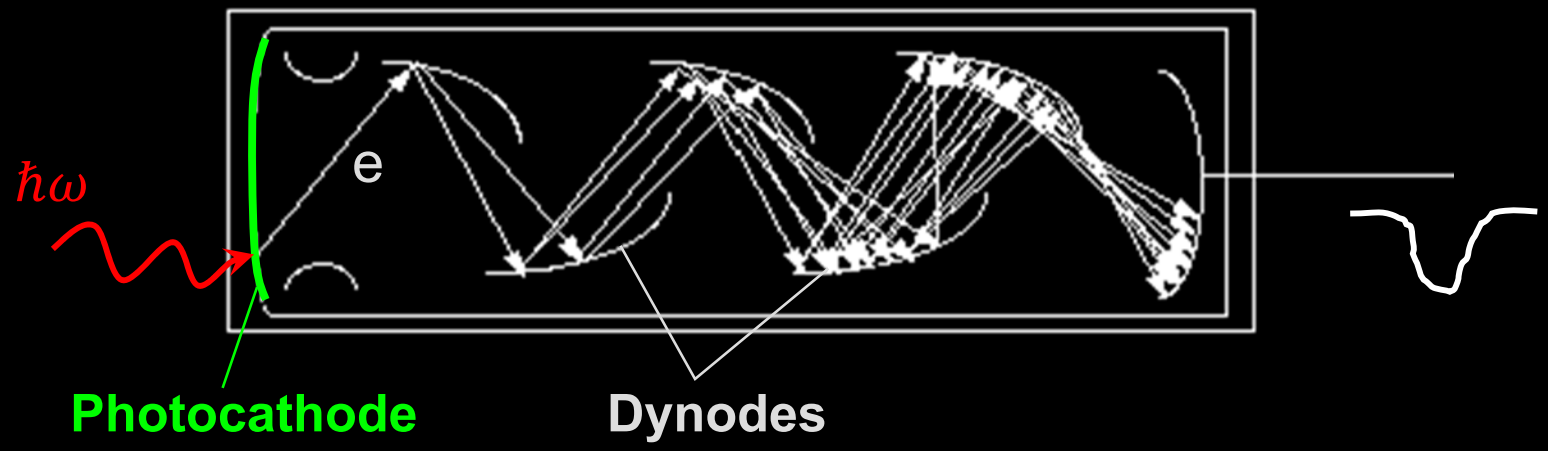

Image reprinted from: http://www.frankswebspace.org.uk/ScienceAndMaths/physics/physicsGCE/D1-5.htm

Single-photon avalanche photodiode

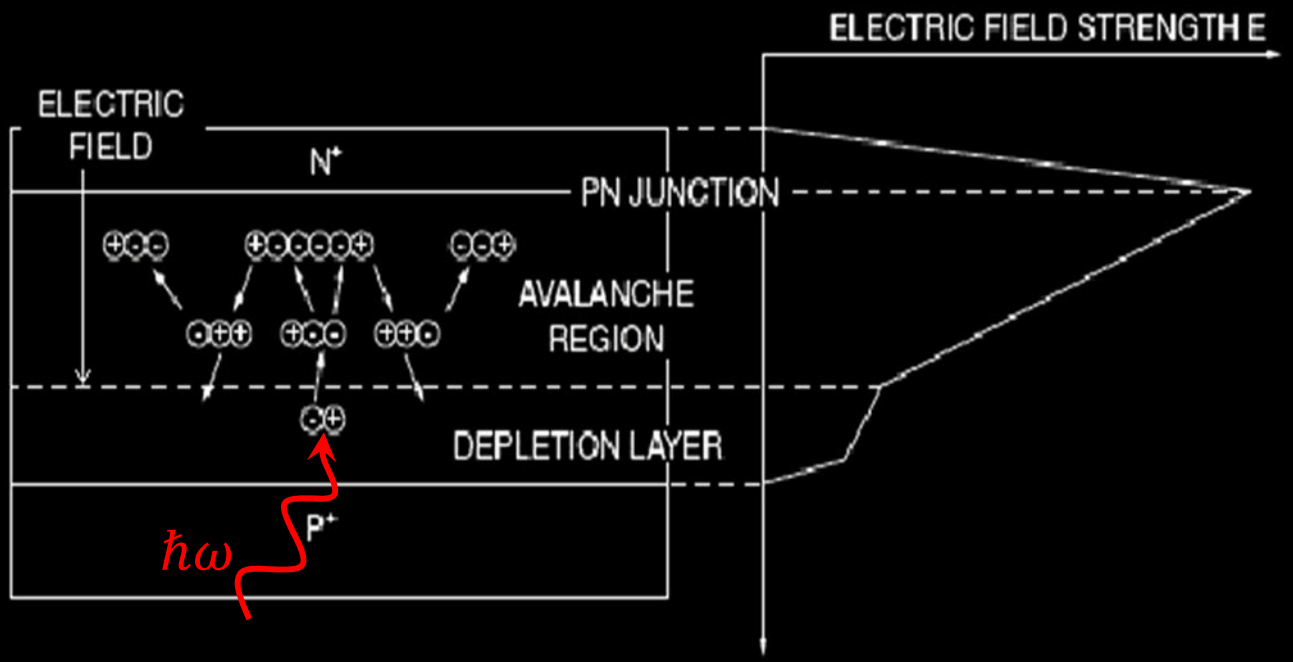

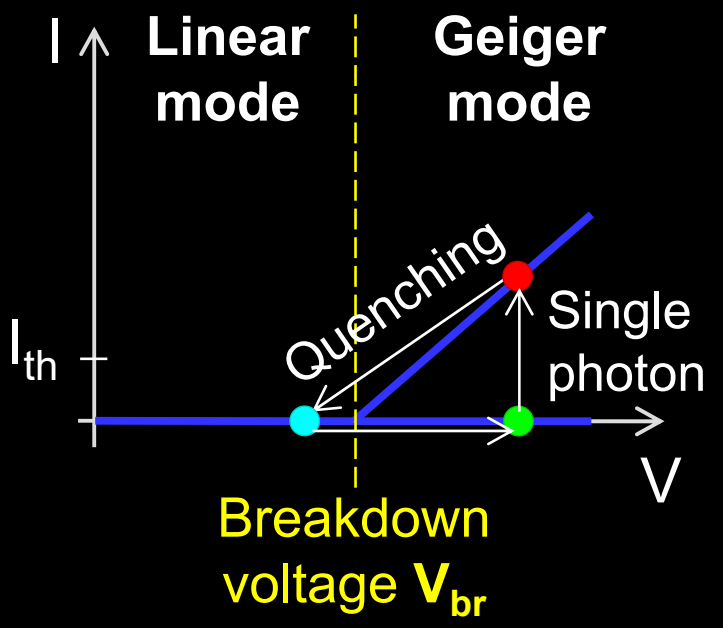

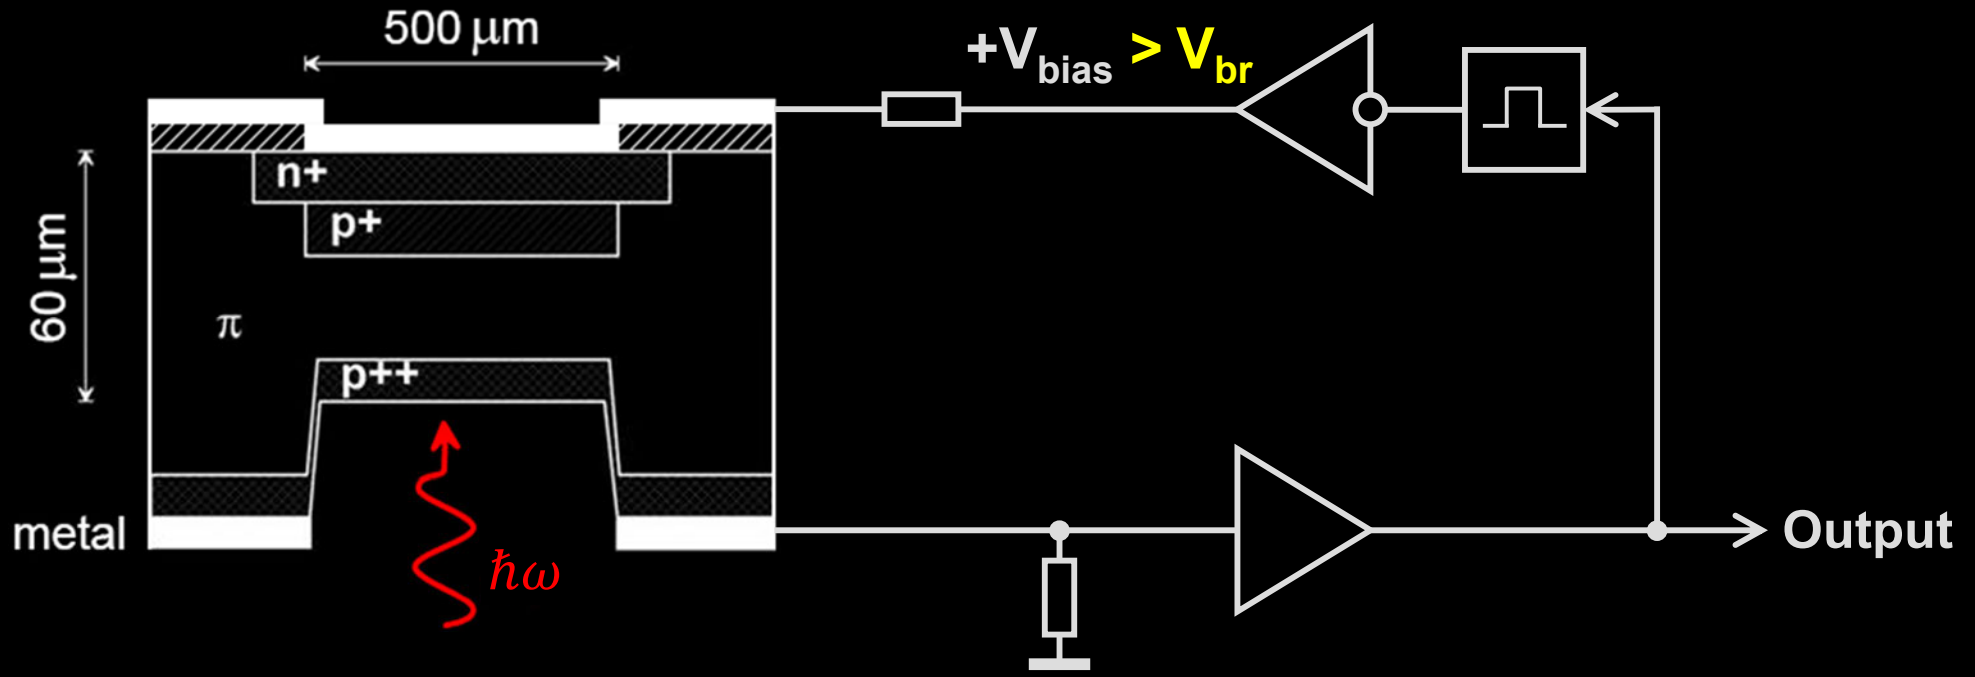

Images reprinted from: https://www.photonicsonline.com/doc/avalanche-photodiodes-theory-and-applications-0001; S. Cova *et al.*, J. Mod. Opt. **51**, 1267 (2004)

Superconducting single-photon detectors

Superconducting nanowire

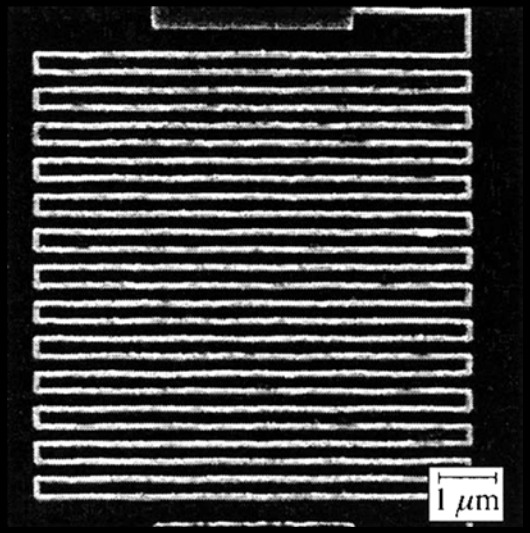

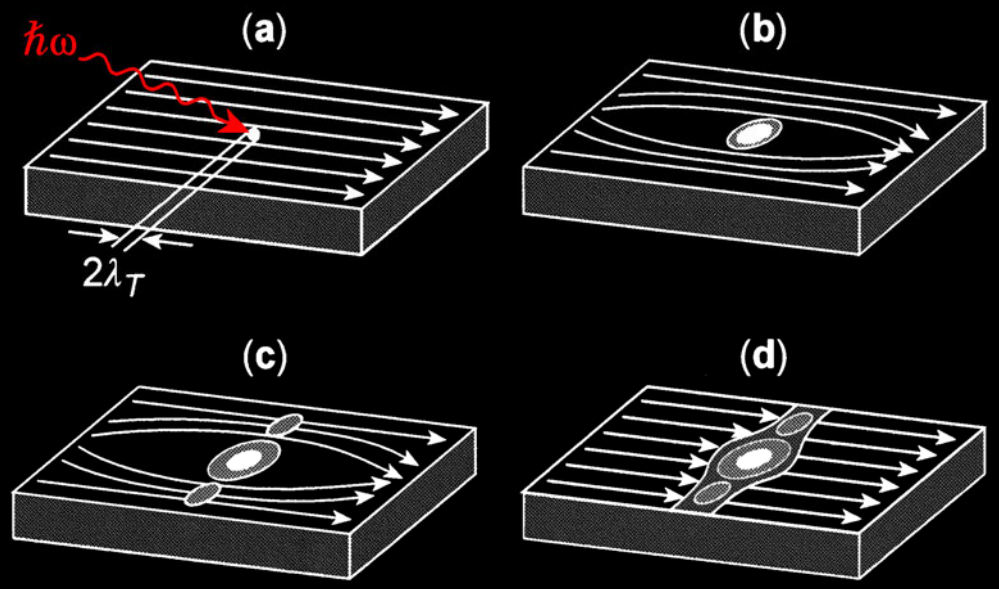

Images reprinted from: R. Sobolewski *et al.*, IEEE Trans. Appl. Supercond. **13**, 1151 (2003)

Transition-edge sensor

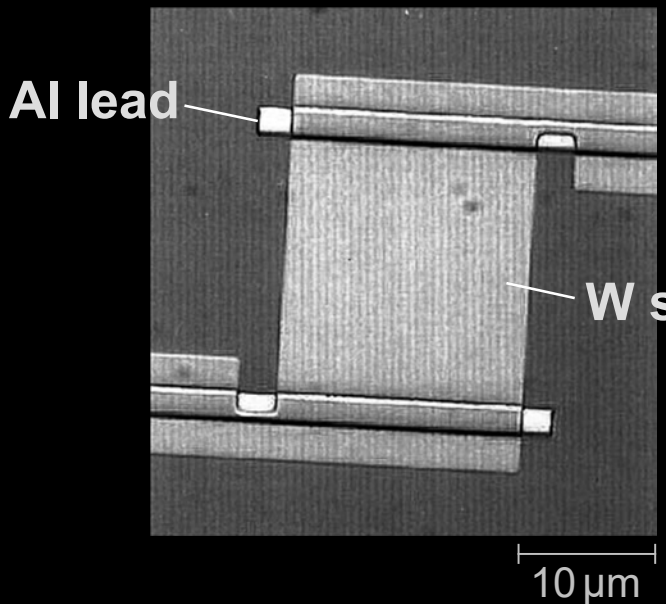

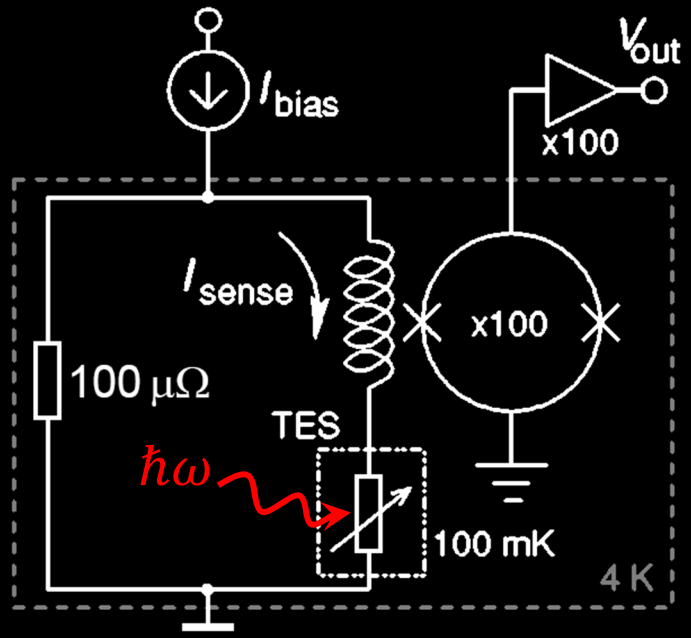

Images reprinted from: B. Cabrera *et al.*, Appl. Phys. Lett. **73**, 735 (1998); A.J. Miller *et al.*, Appl. Phys. Lett. **83**, 791 (2003)

Cooling requirements

Photomultiplier: room temperature

Avalanche photodiode: −50 °C

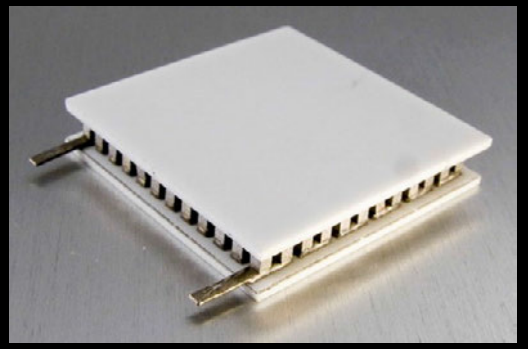

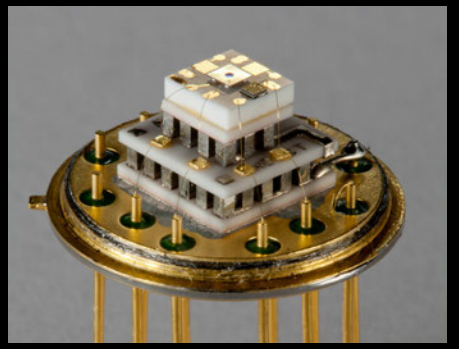

Thermoelectric cooling

0 5 mm

Superconducting nanowire: 4 K

Transition-edge sensor: 100 mK

Images reprinted from: Kryotherm; S. Sauge *et al.*, Opt. Express **19**, 23590 (2011); Advanced Research Systems; University of Cape Town

Assembled fiber optics

Quantum key distribution unit Alice (ID Quantique Clavis2)

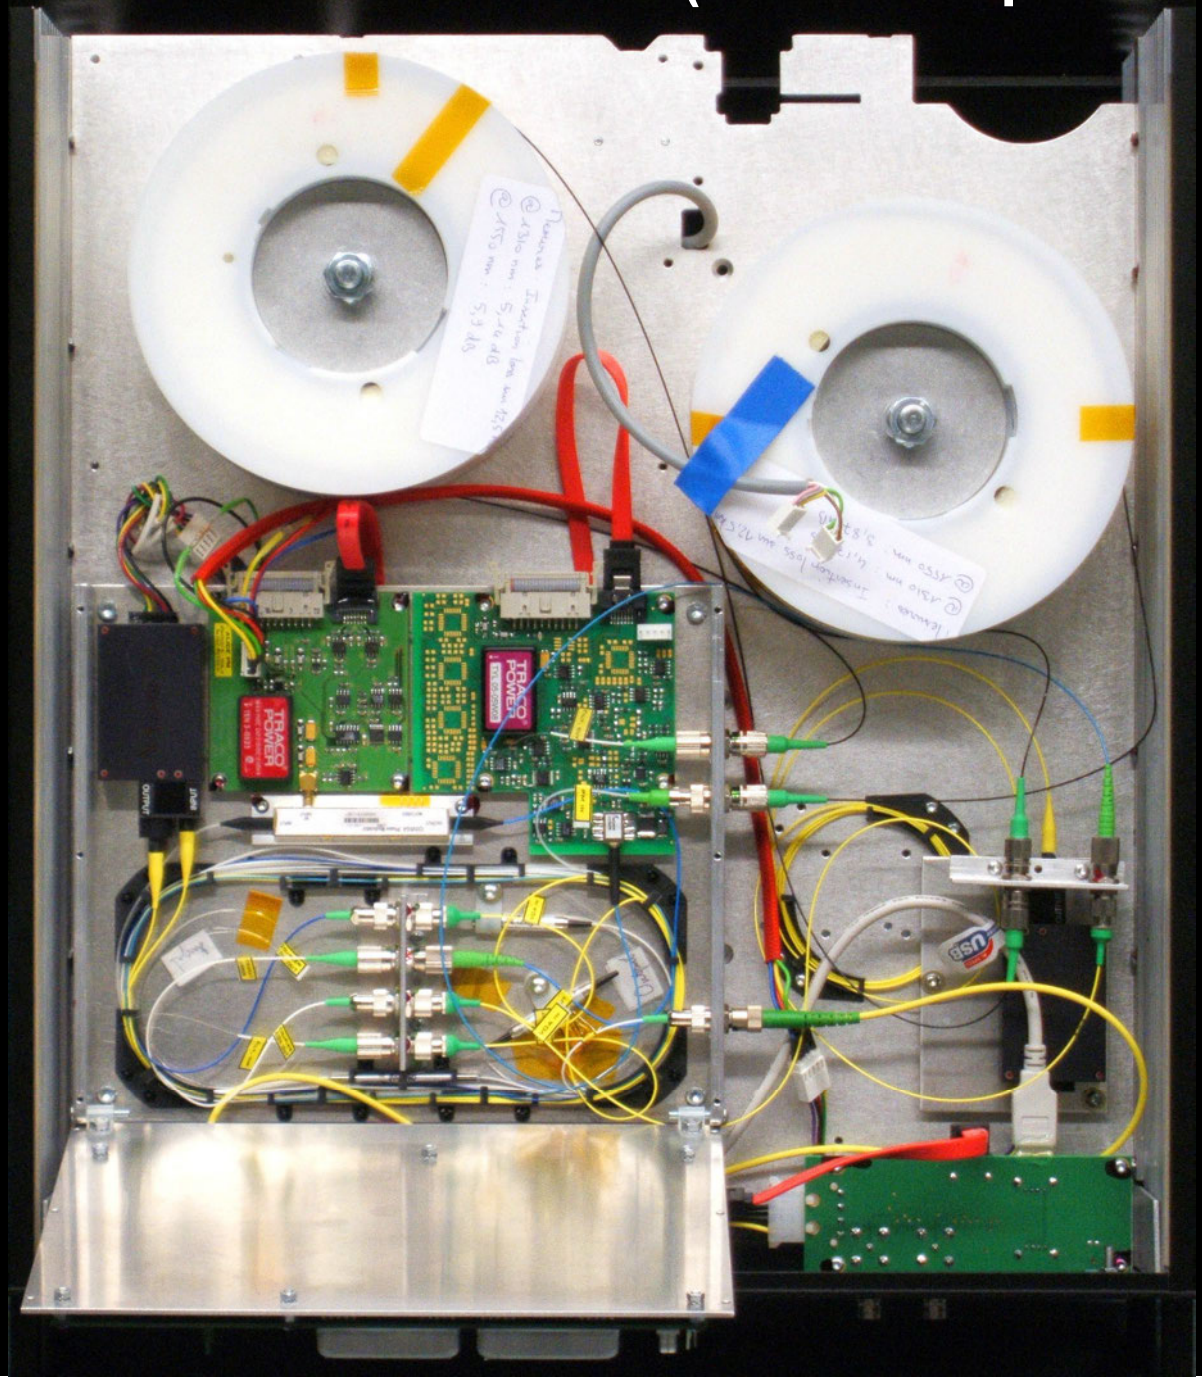

Assembled free-space optics

Bob's polarization analyzer with single-photon detectors

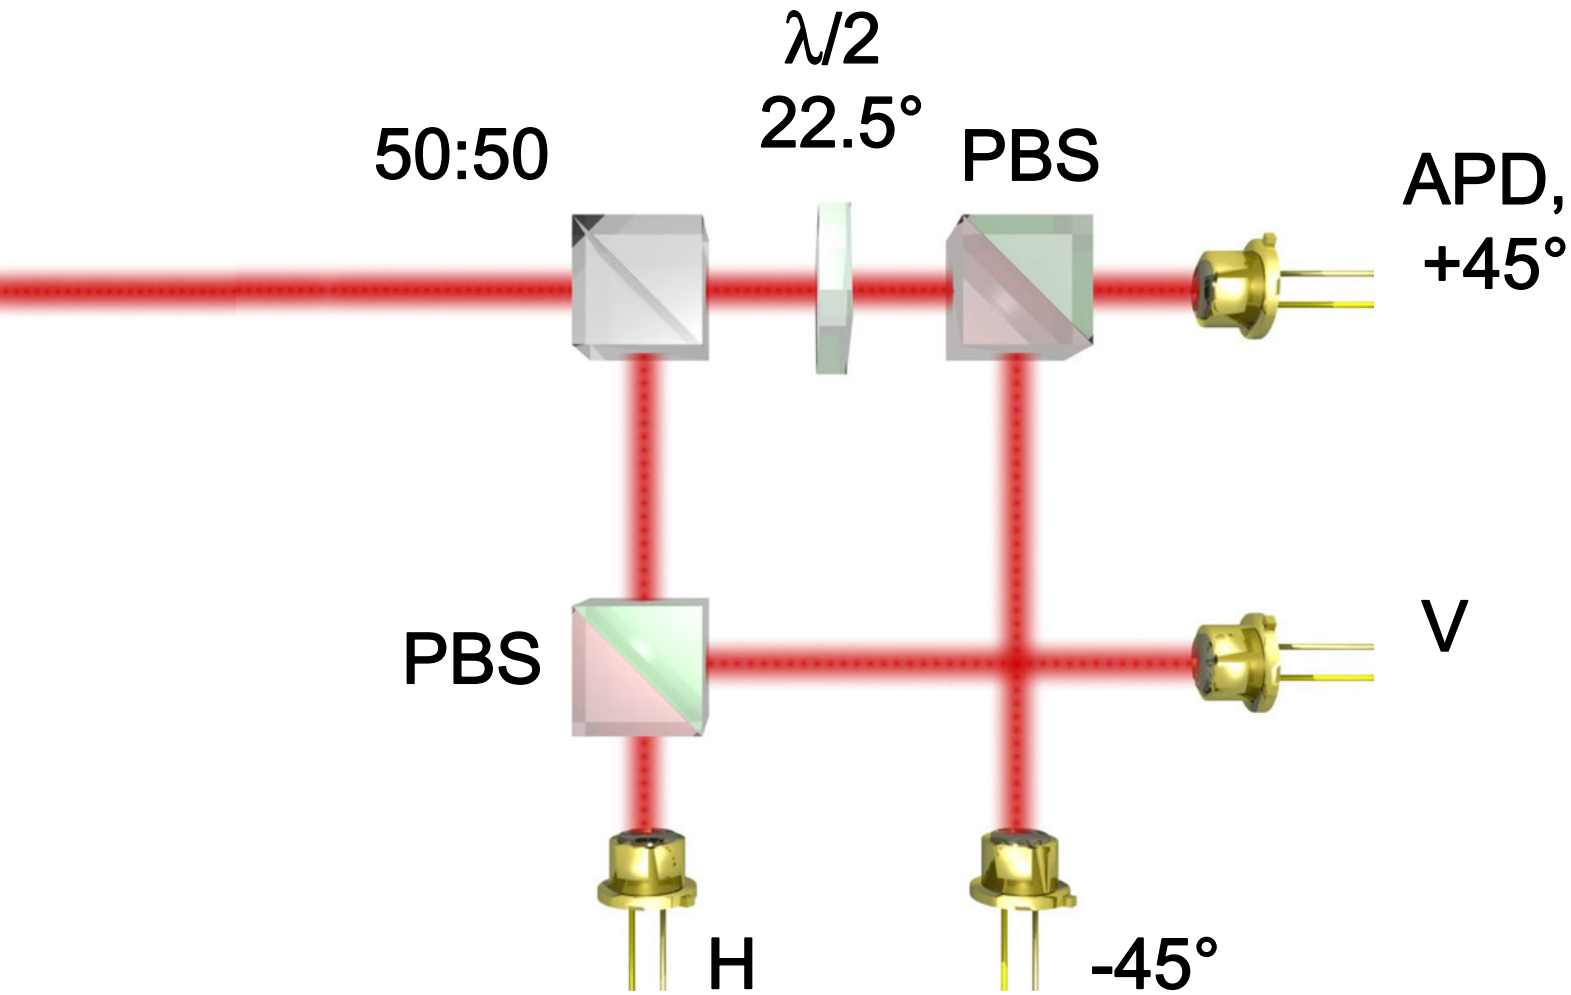

J. G. Rarity, P. C. M. Owens, P. R. Tapster, J. Mod. Opt. **41**, 2435 (1994)

Assembled free-space optics

Bob's polarization analyzer with single-photon detectors

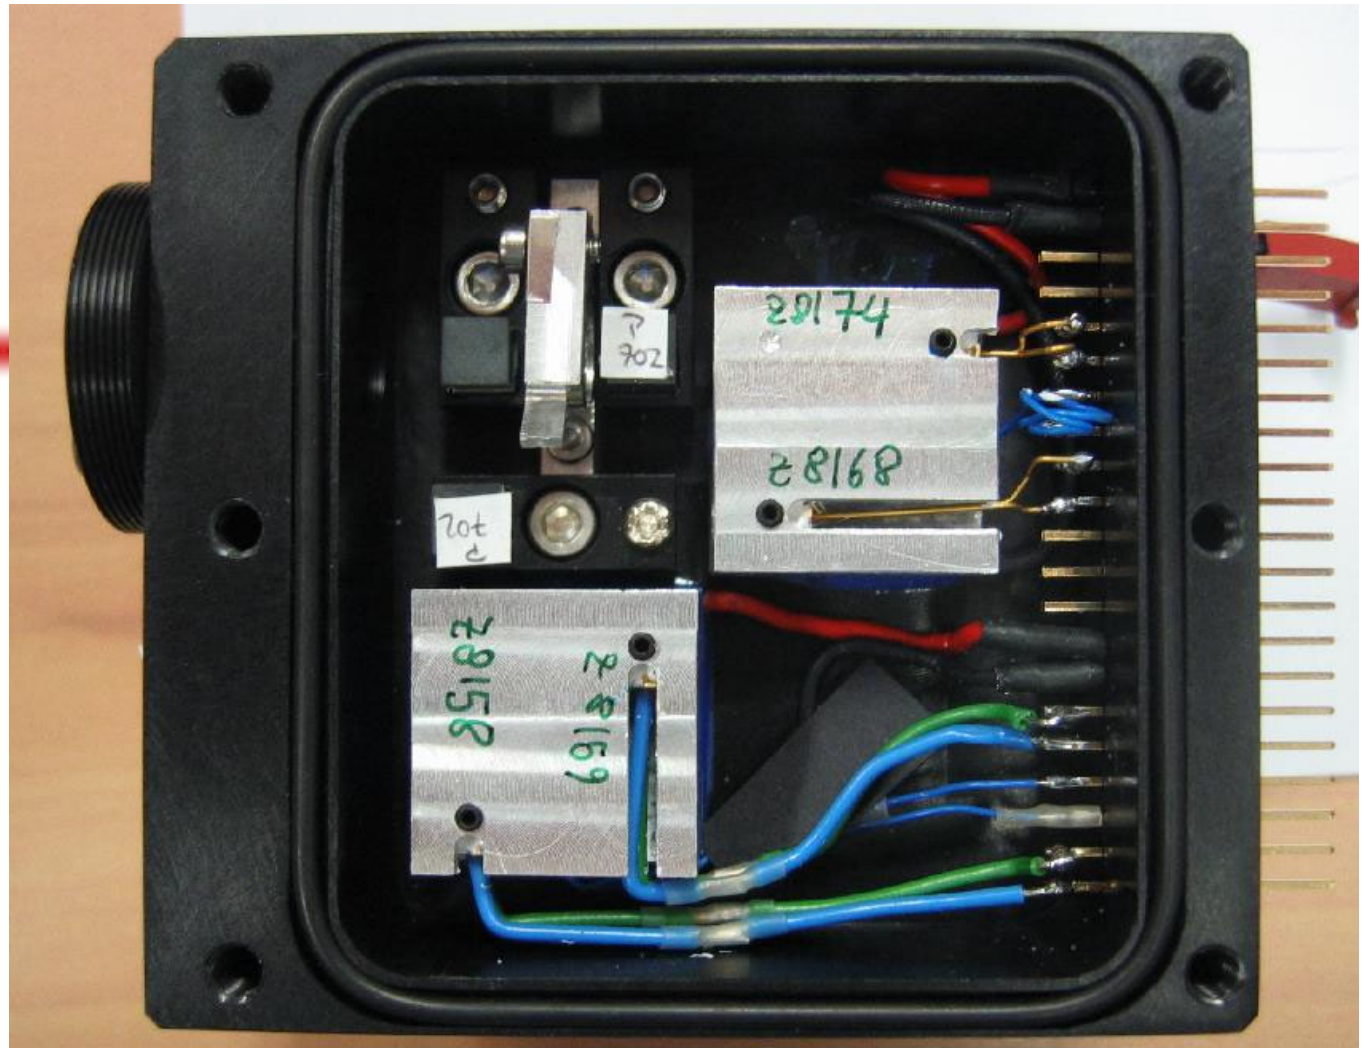

J. G. Rarity, P. C. M. Owens, P. R. Tapster, J. Mod. Opt. **41**, 2435 (1994)

Emerging: integrated optics

Quantum key distribution system

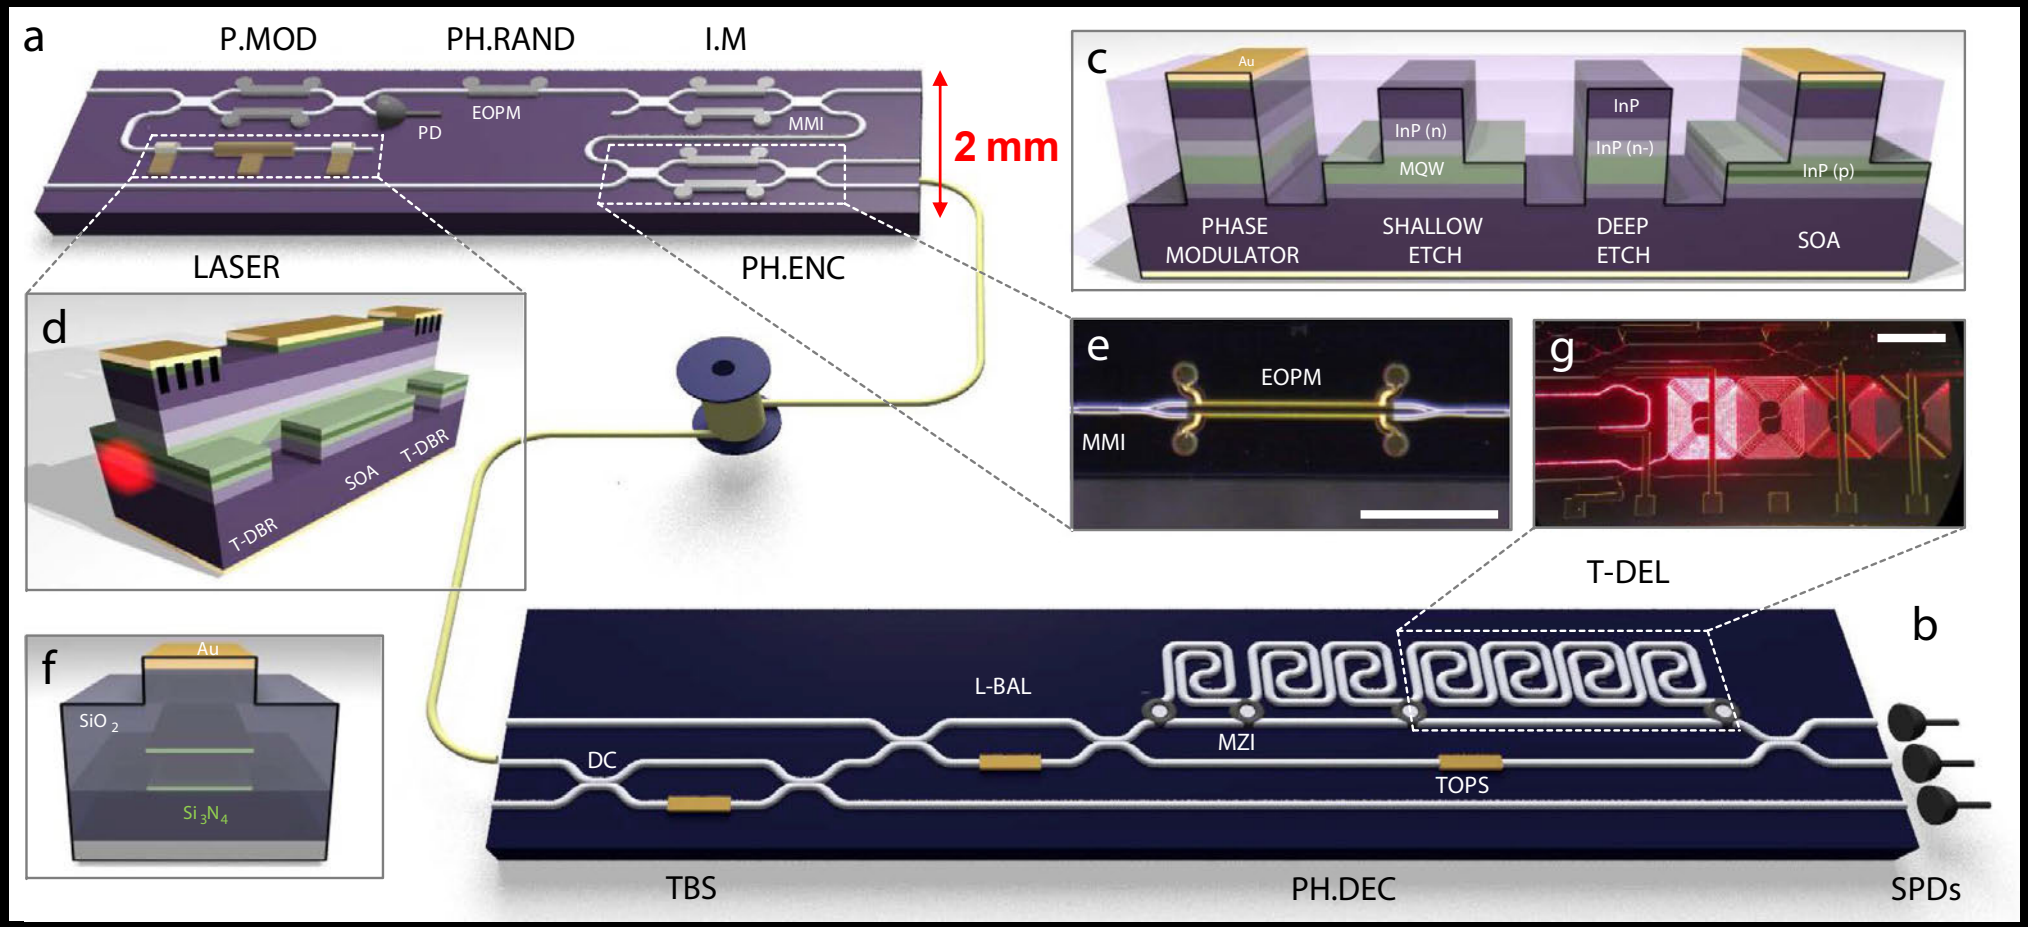

P. Sibson *et al.*, Nat. Commun. **8**, 13984 (2017)
A. W. Elshaari *et al.*, Nat. Photonics **14**, 285 (2020)